

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Napa 2

08942 NAP26IN20-SLV

Napa 2 10W/12W/15W/17W/20W Downlight CCT switchable

- High efficiency up to 150lm/W
- Optional add-on emergency kits, available in standard and self-test
- Switchable wattage and CCT (3000/4000/5700K)
- Optional plug-in emergency modules, available in standard, self-test and DALI
- DALI, 0-10V and PUSH dimming alternate driver available
- Low glare
- SDCM < 3

Overview

The Napa LED Commercial

Downlight has a switchable wattage and colour temperature function so that the installer can choose the perfect ambience. It has an ultra-high energy efficiency of up to 150lm/W, saving you energy and money. The downlight is compatible with Kosnic emergency modules.



IP54



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP54
Materials	Housing: Aluminium + PC
Protection Rating	Class III
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	79,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-2:2012, EN 62471:2008, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	NAP26IN20-SLV
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	22.2A/53µS
Settable Wattages	10W, 12W, 15W, 17W, 20W
Driver Code/Part number	DR20C23-50
Driver Maximum Power (W)	20
Driver Output Current (mA)	230, 290, 360, 420, 500
Power Factor	0.97
Driver Power Factor	0.9
Settable Colour Temperatures	3000K, 4000K, 5700K
SDCM of CCT	<6
CRI	80
Dimmable	N
Flicker	<1%
Lumens Output Maximum	2,800 lm
Maximum Efficiency	150 lm/W
Emergency Luminous Flux	500 lm
L70B50 Lifetime (h) @Ta 25 °C	126,000 h
L80B10 Lifetime (h) @Ta 25 °C	79,000 h
L90B10 Lifetime (h) @Ta 25 °C	37,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	750
Blue Light Hazard	RG0
Weight	0.412Kg
Dimensions (L x W x D) (mm)	105xØ190
Cut-Out (mm)	160
Beam Angle - Lumi (°)	60
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Napa 2



08942 NAP26IN20-SLV

Overview

The Napa LED Commercial Downlight has a switchable wattage and colour temperature function so that the installer can choose the perfect ambience. It has an ultra-high energy efficiency of up to 150lm/W, saving you energy and money. The downlight is compatible with Kosnic emergency modules.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP54
Materials	Housing: Aluminium + PC
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

Optional Gear

Product Code	Description	Type
DRC26/CSB	Dimmable Driver: Casambi dimmable driver 26W Bluetooth & PUSH button	Dimmable Driver
DRC20/DA	Dimmable Driver: 20W DALI2 primary push dim driver	Dimmable Driver
DRC30/DA	Dimmable Driver: 30W DALI, 1-10V, Primary PUSH Driver	Dimmable Driver
UEM03	Universal Emergency Module 3W	Emergency Module
UEM03/SST	Universal Emergency Module Duo 3.5W Standard&Self-test	Emergency Module
UEM04	Universal Emergency Module Pro 4W	Emergency Module
UEM04/SST	Universal Emergency Module Pro Duo 4W Standard/Self Test	Emergency Module
UEM04/DA	Universal Emergency Module Pro DALI 4W	Emergency Module
EMPAD01	Neka Emergency Downlight kit 2.5W Manual test	Emergency Module
EMPAD01/SST	Neka Duo Emergency Downlight kit 2.5W Manual & Self-test	Emergency Kit

Rated Power (W)	Current (mA)	CCT (K)	Lumen (lm)
10	45	3000 (Warm White)	1300
10	45	4000 (Cool White)	1350
10	45	5700 (Day Light)	1250
12	54	3000 (Warm White)	1560
12	54	4000 (Cool White)	1620
12	54	5700 (Day Light)	1500
15	67	3000 (Warm White)	1950
15	67	4000 (Cool White)	2020
15	67	5700 (Day Light)	1870
17	76	3000 (Warm White)	2210
17	76	4000 (Cool White)	2290
17	76	5700 (Day Light)	2120
20	90	3000 (Warm White)	2700
20	90	4000 (Cool White)	2800
20	90	5700 (Day Light)	2700

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only


Napa 2

08942 NAP26IN20-SLV

Overview

The Napa LED Commercial

Downlight has a switchable wattage and colour temperature function so that the installer can choose the perfect ambience. It has an ultra-high energy efficiency of up to 150lm/W, saving you energy and money. The downlight is compatible with Kosnic emergency modules.

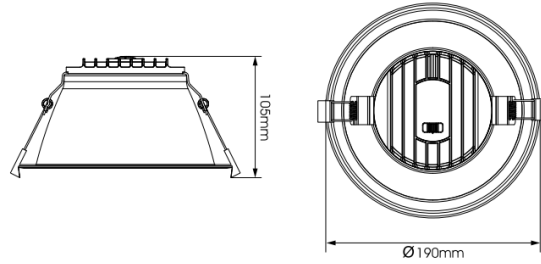

NAP26IN20-SLV



IP54



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP54
Materials	Housing: Aluminium + PC
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

