

**5** 5 Years  
Product Warranty  
UK Only

**3** 3 Years  
On-Site Warranty  
Main-land UK Only




# DD 2 HE

08964 DD2HE18/2P-SCT

## DD 2 HE 9W/12W/15W/18W High Efficiency 2 pin DD lamp CCT

- High efficiency up to 185lm/W
- Optional plug-in microwave corridor sensor compatible with Uni-Remote
- Switchable wattage and CCT (2700/4000/6500K)
- Optional plug-in emergency modules, available in standard, self-test and DALI
- Save energy by up to 65%
- Replacement for 16W, 28W, 38W fluorescent DD lamps used with magnetic ballast

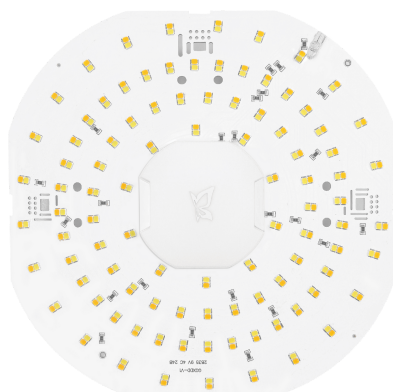

### Overview

Kosnic's range of LED DD lamps takes a fresh approach to functional lighting with a design philosophy offering compatible emergency packs and microwave sensor so that there are no barriers to retrofitting LEDs in commercial fittings. These lamps also have an ultra high efficiency saving you energy and money.

**IP20**



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Installation Area	Internal

### Compliance

LVD	EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

### Technical Summary

Product Code	DD2HE18/2P-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	2.85 A / 40 µs
Settable Wattages	9W, 12W, 15W, 18W
Power Factor	>0.9
Settable Colour Temperatures	2700K, 4000K, 6500K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	3,330 lm
Emergency Luminous Flux	185 lm
L70B50 Lifetime (h) @Ta 25 °C	30,000 h
Nominal Lifetime (h)	30,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.15Kg
Dimensions (L x W x D) (mm)	192x192x35
Beam Angle - Lumi (°)	120
LS Energy Efficiency Class	C

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

**5** 5 Years  
Product Warranty  
UK Only

**3** 3 Years  
On-Site Warranty  
Main-land UK Only

# DD 2 HE



08964 DD2HE18/2P-SCT

## Overview

Kosnic's range of LED DD lamps takes a fresh approach to functional lighting with a design philosophy offering compatible emergency packs and microwave sensor so that there are no barriers to retrofitting LEDs in commercial fittings. These lamps also have an ultra high efficiency saving you energy and money.

**IP20**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Nominal Lifetime (h)	30,000 h
Installation Area	Internal

## Optional Gear

Product Code	Description	Type
EMDD202	DD EME 2 2W standard emergency module for LED DD and bulkhead	Emergency Module
EMDD202/SST	DD EME 2 Duo 2W emergency module for LED DD and bulkhead	Emergency Module
EMDD202/DA	DD EME 2 DALI-2 2W & Self-test emergency module	Emergency Module
LUL-M/D	Lulu Plug in microwave motion and daylight sensor 12V DC	Microwave Sensor

## Accessories

Product Code	Description	Type
DDLAMPPLD	LED DD Lamp holder for 4pin GR10q	Housing
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control

Rated Power (W)	Current (mA)	CCT (K)	Power Factor	Lumen (lm)
9	46	2700 (Warm White)	0.85	1575
9	46	4000 (Cool White)	0.85	1620
9	46	6500 (Day Light)	0.85	1665
12	57	2700 (Warm White)	0.91	2100
12	57	4000 (Cool White)	0.91	2160
12	57	6500 (Day Light)	0.91	2220
15	70	2700 (Warm White)	0.93	2625
15	70	4000 (Cool White)	0.93	2700
15	70	6500 (Day Light)	0.93	2775
18	82	2700 (Warm White)	0.95	3150
18	82	4000 (Cool White)	0.95	3240
18	82	6500 (Day Light)	0.95	3330

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)




Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

**5** 5 Years  
Product Warranty  
UK Only

**3** 3 Years  
On-Site Warranty  
Main-land UK Only

# DD 2 HE

08964 DD2HE18/2P-SCT

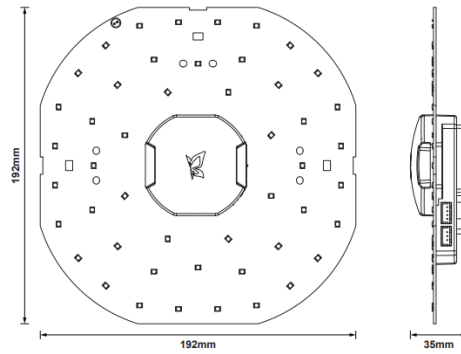

## Overview

Kosnic's range of LED DD lamps takes a fresh approach to functional lighting with a design philosophy offering compatible emergency packs and microwave sensor so that there are no barriers to retrofitting LEDs in commercial fittings. These lamps also have an ultra high efficiency saving you energy and money.

**IP20**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Nominal Lifetime (h)	30,000 h
Installation Area	Internal

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

