

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only



# Orda 2 DALI

09001      ORD03-BLK/DA

## Orda 2 DALI Emergency twin-spot 3W DALI-2&Self-test Black

- Trunk mount option and accessories included
- Non-maintained
- Fully adjustable twin heads allow best light coverage
- IP65, IK10
- Options of white and black finish
- DALI-2 conforming to EN 62386-202

### Overview

The Orda LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.



### General Information

|                   |                       |
|-------------------|-----------------------|
| IK Rating         | IK10                  |
| IP Rating         | IP65                  |
| Protection Rating | Class II              |
| Installation Area | Internal and External |

### Compliance

|        |   |
|--------|---|
| LVD    | EN 60598-1:2024, EN 60598-2-22:2022, EN 62493:2015+A1:2022  |
| EMC    | EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023 |
| Others | UKCA, CE, RoHS, WEEE, REACH   |

### Technical Summary

|                                     |                    |
|-------------------------------------|--------------------|
| Product Code                        | ORD03-BLK/DA       |
| Default CCT                         | 6,500 K            |
| CRI                                 | 80                 |
| Lumens Output Maximum               | 370 lm             |
| Maximum Efficiency                  | 110 lm/W           |
| Emergency Luminous Flux             | 330 lm             |
| Maintained Luminous Flux            | 330 lm             |
| Weight                              | 0.68Kg             |
| UEM/EME Battery Life                | 7 y                |
| UEM/EME Input Voltage               | 220-240Vac 50/60Hz |
| UEM/EME Ambient Temperature Range   | 0°C to 50°C        |
| UEM/EME CCT                         | 6,500 K            |
| UEM/EME Weight                      | 0.68 kg            |
| UEM/EME Dimensions (L x W x D) (mm) | 261x184x78         |
| Beam Angle - Lumi (°)               | 110                |

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting   KosnicUK   KosnicLightingUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Orda 2 DALI



09001 ORD03-BLK/DA

## Accessories

| Product Code | Description  | Type    |
|--------------|--|---------|
| BAT18LFP2/L  | Battery for Emergency sign DALI of MULU NITRO DOXA ORDA 3W | Battery |


## Overview

The Orda LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as standard or self-test versions. With two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Suitable for factories and industrial sites.



## General Information

|                   |                       |
|-------------------|-----------------------|
| IK Rating         | IK10                  |
| IP Rating         | IP65                  |
| Protection Rating | Class II              |
| Installation Area | Internal and External |

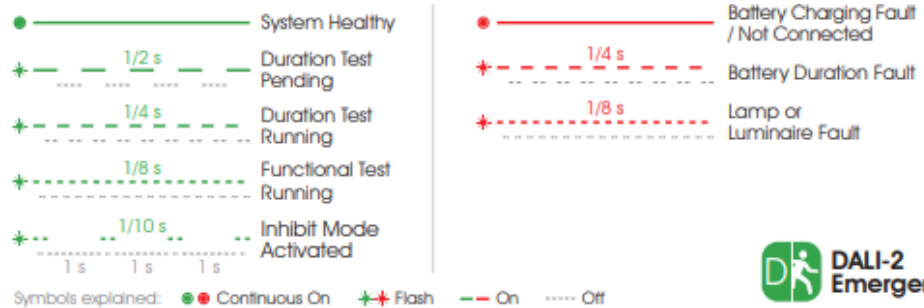

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

