7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Odin


Kosnic
LIGHTING • SIMPLY BETTER

09014 ODI24-ASCT-GRY/DS

Odin sensor wall pack 14-24W CCT sct 90°x150°beam grey

- High efficiency up to 129lm/W
- Optional plug-in emergency modules, available in standard, self-test and DALI
- Switchable wattage and CCT switchable (3000K/4000K/6500K)
- Dusk-to-dawn sensor, plug in before use
- Available in two beam angles versions
- Suitable to use at coastal areas
- IP65 and vandal resistant IK10





Overview

The Odin low glare LED Surface Luminaire offers a low maintenance solution to lighting for all areas, with switchable wattage and CCT to meet your needs.

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing - Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	48,000 h

Compliance

Others	UKCA, CE, RoHS, WEEE

Technical Summary	
Product Code	ODI24-ASCT-GRY/DS
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	18.1A / 226us
Settable Wattages	14W, 17W, 21W, 24W
Power Factor	0.9
Settable Colour Temperatures	3000K, 4000K, 6500K
SDCM of CCT	6
CRI	82
Dimmable	N
Flicker	<2%
Lumens Output Maximum	3,000 lm
Maximum Efficiency	129 lm/W
Maintained Luminous Flux	120 lm
L80B10 Lifetime (h) @Ta 25 °C	48,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.199Kg
Dimensions (L x W x D) (mm)	219x311x163
Beam Angle - Lumi (°)	90x150
LS Energy Efficiency Class	D
Sensor Function	Dawn to Dusk

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Odin

Kosnic
LIGHTING • SIMPLY BETTER

09014 ODI24-ASCT-GRY/DS

Overview


The Odin low glare LED Surface Luminaire offers a low maintenance solution to lighting for all areas, with switchable wattage and CCT to meet your needs.

Rated Power (W)	CCT (K)	Lumen (lm)
14	3000 (Warm White)	1700
14	4000 (Cool White)	1800
14	6500 (Day Light)	1700
17	3000 (Warm White)	2000
17	4000 (Cool White)	2200
17	6500 (Day Light)	2000
21	3000 (Warm White)	2400
21	4000 (Cool White)	2600
21	6500 (Day Light)	2400
24	3000 (Warm White)	2700
24	4000 (Cool White)	3000
24	6500 (Day Light)	2700

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing - Polycarbonate
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

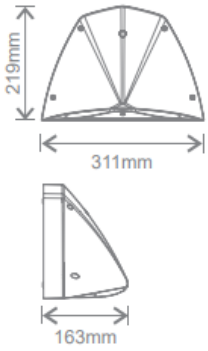

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK


7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Odin

Kosnic
LIGHTING • SIMPLY BETTER

09014 ODI24-ASCT-GRY/DS

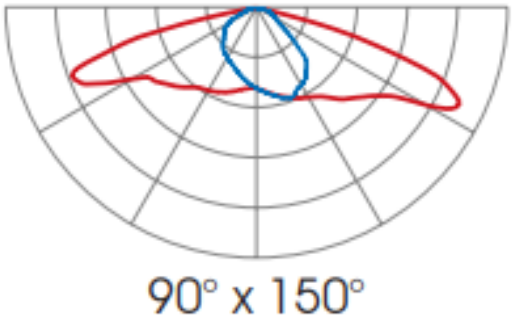

Overview

The Odin low glare LED Surface Luminaire offers a low maintenance solution to lighting for all areas, with switchable wattage and CCT to meet your needs.

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing - Polycarbonate
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK