

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Nile 3

09033 NIL35F50-W1SCT-WHT/DA

## Nile 3 7W/50W 5ft batten, PS diffuser, White



- High efficiency up to 135lm/W
- Switchable CCT (3000/4000/5000K)
- UGR<19\*
- DALI and PUSH dimming alternative driver available
- Slick and stylish design, ideal for modern offices
- Suspension or interlock-mounting options
- Variety of diffuser and beam options
- Built-in backlight option available
- Available in white and black

### Overview

The Nile suspended battens are available in black or white with diffuser/beam options. They can cast 30% of the light up and 70% down, or all downwards. Ideal for offices, classrooms and corridors. With DALI,1-10,Push dimming and emergency options.



**IP20**

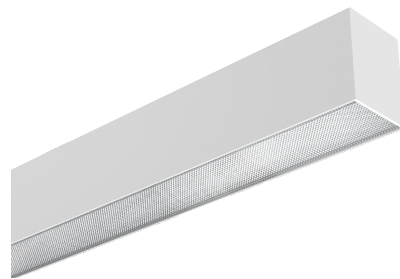

### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Materials	Housing: Aluminium + PC
Protection Rating	Class I
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	37,000 h

### Technical Summary

Product Code	NIL35F50-W1SCT-WHT/DA
Input Voltage Supply	220-240Vac 50/60Hz
Power Factor	>0.9
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<3
CRI	82
Lumens Output Maximum	6,750 lm
L80B10 Lifetime (h) @Ta 25 °C	37,000 h
Dimensions (L x W x D) (mm)	1437x80x64

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 61347-1:2015+A1:2021, EN 61347-13:2014+A1:2017, EN 62031:2020, EN 62471:2008
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK

KosnicLightingUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Nile 3



09033 NIL35F50-W1SCT-WHT/DA

## Overview

The Nile suspended battens are available in black or white with diffuser/beam options. They can cast 30% of the light up and 70% down, or all downwards. Ideal for offices, classrooms and corridors. With DALI,1-10,Push dimming and emergency options.



IP20




## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Materials	Housing: Aluminium + PC
Protection Rating	Class I
Installation Area	Internal

## Accessories

Product Code	Description	Type
NIL34F-BLANK-WHT	1.2 length blank section, White	Blank Section
NIL35F-W1	Wiring Connector On/Off 1.5m	Connector kit
NIL35F-W2	Wiring Connector DALI 1.5m	Connector kit
NIL3-CI	Inline Interlock I Connector	Connector kit
NIL3-CL-WHT	Switchable 14/17/21/24W "L" interlock connector, White	Connector kit
NIL3-CT-WHT	Switchable 21/26/32/36W "T" interlock connector, White	Connector kit
NIL3-CX-WHT	Switchable 28/34/42/48W "X" interlock connector, White	Connector kit
NIL3-DFS10	Nile 3 Diffuser 10m Reel	Diffuser

Rated Power (W)	Beam angle (°)	CCT (K)	Lumen (lm)
7 (up light)	110	3000 (Warm White)	800
7 (up light)	110	4000 (Cool White)	860
7 (up light)	110	5000 (Day Light)	870
50 (down light)	80	3000 (Warm White)	6500
50 (down light)	80	4000 (Cool White)	6750
50 (down light)	80	5000 (Day Light)	6750



Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only


# Nile 3




09033 NIL35F50-W1SCT-WHT/DA

## Overview


The Nile suspended battens are available in black or white with diffuser/beam options. They can cast 30% of the light up and 70% down, or all downwards. Ideal for offices, classrooms and corridors. With DALI,1-10,Push dimming and emergency options.



Up Light 110°



Microprism PS Diffuser 80°



Reflector 50°



IP20



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Materials	Housing: Aluminium + PC
Protection Rating	Class I
Installation Area	Internal

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

