

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Manot 2 in 1

09061 MAN0305/SST

## Manot Duo Emergency Bulkhead Manual & Self-test 6500K

- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic self-test conforming to BS-EN-62034
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- Used as emergency exit sign as well as emergency light
- Maintained and non-maintained option
- Surface-mounting positions
- IP65 and IK10 (vandal resistant) for external uses
- BESA box fitting points



## Overview

The Manot LED Emergency Exit

Bulkhead is a self-contained, robust, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket.

Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light.



## General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II
L80B10 Lifetime (h) @Ta 25 °C	118,000 h

## Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021, EN 61347-2-13:2014+A1:2017, EN 62031:2020, EN 62034:2012, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

## Technical Summary

Product Code	MAN0305/SST
Default Power	5 W
Default CCT	6,500 K
Lumens Output Maximum	60 lm
Maximum Efficiency	30 lm/W
Emergency Luminous Flux	60 lm
Maintained Luminous Flux	150 lm
L80B10 Lifetime (h) @Ta 25 °C	118,000 h
Weight	0.65Kg
Dimensions (L x W x D) (mm)	325x158x48
BESA Entry	True
UEM/EME Battery Life	5 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME Power Factor	0.6
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Automatic Self-Test
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	158x325x48
UEM/EME Emergency Operation Test	Self-Test (ATS Type S)
Beam Angle - Lumi (°)	120

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK

KosnicLightingUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only



# Manot 2 in 1

09061 MAN0305/SST

## Accessories

Product Code	Description	Type
MAN-ESL	Manot, Exit Sign Left	Sign
MAN-ESR	Manot, Exit Sign Right	Sign
MAN-BKT	Manot, Wall-mount Tilting Bracket	Clips/Brackets
BATS18LFP1	Battery for DD EME 2, Doxa 2 & EME light 2 in 1, Temp sensor	


## Overview

The Manot LED Emergency Exit Bulkhead is a self-contained, robust, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket. Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light.



## General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Protection	Class II
Rating	
Installation Area	Internal and External
UEM/EME	Class II
Protection	

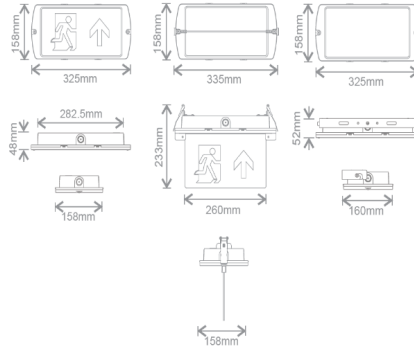

### Healthy Statuses:

- System Healthy
- \* 1/2 s Duration Test Pending
- \* 1/4 s Duration Test Running
- \* 1/8 s Functional Test Running

Symbols explained: ● Continuous On \* Flash - - - - On - - - - Off

### Faults & Warning:

- Battery Charging Fault / Not Connected
- \* 1/4 s Battery Duration Fault
- \* 1/8 s Lamp or Luminaire Fault
- \* 5 s 1 s Installation Fault Warning

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK




**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Manot 2 in 1

09061 MAN0305/SST

## Push switch

	FUNCTIONAL TEST
	DURATION TEST
	INDICATOR DIMMING

## Overview

The Manot LED Emergency Exit Bulkhead is a self-contained, robust, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket. Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light.



**IP65**



## General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

