7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Low Temp. Mulu 2 in 1

Kosnic
LIGHTING • SIMPLY BETTER

09066 MUL0105-LO/SST

Mulu Low Temp.Duo Emergency Bulkhead Manual&Self-test 6500K

- Can be used in ultra-low temperature environment
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic Self-test conforming to BS-EN-62034
- All legends included
- Maintained and non-maintained option
- 20mm Conduit entry
- IP65 and IK10 (vandal resistant) for internal & external uses
- Dual entry push-wire terminal block for easy loop-in loop-out wiring
- BESA box fitting points



Overview

Mulu LED Emergency Exit Sign or Emergency Bulkhead Luminaire is a self-contained, multi-purpose, non-maintained or maintained 3-hour emergency luminaire solution. It can be used with or without the emergency exit graphics and is supplied with adaptable self-adhesive graphics for escape routes guidance.

IP65

General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: ABS. Diffuser: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II
L80B10 Lifetime (h) @Ta 25 °C	109,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021, EN 61347-2-13:2014+A1:2017, EN 62031:2020, EN 62493:2015+A1:2022
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary	
Product Code	MUL0105-LO/SST
Lumens Output Maximum	160 lm
Emergency Luminous Flux	80 lm
Maintained Luminous Flux	80 lm
L80B10 Lifetime (h) @Ta 25 °C	109,000 h
BESA Entry	True
Conduit Entry 20mm	Yes
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	-20°C to 50°C
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class II
UEM/EME Weight	0.5 kg
UEM/EME Dimensions (L x W x D) (mm)	352x110x67

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Low Temp. Mulu 2 in 1

Kosnic
LIGHTING • SIMPLY BETTER

09066 MUL0105-LO/SST

Accessories

Product Code	Description	Type
BATS16LFP1	Battery LiFePO4 1600mAh 3.2V	Battery

Overview

Mulu LED Emergency Exit Sign or Emergency Bulkhead Luminaire is a self-contained, multi-purpose, non-maintained or maintained 3-hour emergency luminaire solution. It can be used with or without the emergency exit graphics and is supplied with adaptable self-adhesive graphics for escape routes guidance.

IP65

General Information


IK Rating	IK10
IP Rating	IP65
Materials	Housing: ABS. Diffuser: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II







Push switch

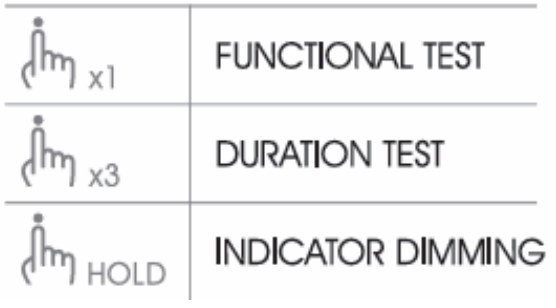

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK