

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only




Niva 3

NIV4FS18 NIV4FS18

NIVA 3 interior batten 4ft Single 18W CCT switchable

- Switchable CCT (3000K/4000K/6000K)
- High efficiency up to 156lm/W
- Switchable wattage
- Optional plug-in emergency module available
- Optional DALI 2 and PUSH dimming
- For single and twin tube batten replacement
- 20mm Conduit entry
- BESA box fitting points
- Easy installation with press and release end caps to open the cover



Overview

Niva LED batten utilises high performance LEDs to offer outstanding lumen efficiency. With switchable CCT and are suitable for a wide range of applications including warehouses, factories and garages. The product range also has the option to install an emergency module and microwave sensor.



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK08
IP Rating	IP20
Materials	Housing polycarbonate
Protection Rating	Class I
Installation Area	Internal

Technical Summary

Product Code	NIV4FS18
Lumens Output Maximum	2,800 lm
Nominal Lifetime (h)	50,000 h
BESA Entry	True
Conduit Entry 20mm	TRUE

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Niva 3



NIV4FS18

Optional Gear

Product Code	Description	Type
NIV-MWS	Niva plug-in ON/OFF microwave sensor	Microwave Sensor
BEM203/ST	3W self-test UEM for linear LED luminaire	Self-test Emergency Module
BEM203	3W standard UEM for linear LED luminaire	Emergency Module
BEM203/DA	Batten UEM DALI-2, 3W emergency module for Kosnic LED batten luminaires	Emergency Module
BEM303	Batten UEM 3W emergency module for battens	Emergency Module
BEM303/ST	Batten UEM 3W Self test emergency module for battens	Self-test Emergency Module
BEM303/DA	Batten UEM 3W DALI switchable for battens for battens	Emergency Module
PIR-SID	P30 Exterior PIR Sensor Side-Mount with RMT-UNI control	PIR Sensor

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS04	LED Panel & Slim Line 2 suspension kit (4 cables per bag)	Suspension Kit
SUS04/25	Suspension kit 2.5m Alden & Nevis & Slim Line 2 (4 cables per bag)	Suspension Kit

Overview

Niva LED batten utilises high performance LEDs to offer outstanding lumen efficiency. With switchable CCT and are suitable for a wide range of applications including warehouses, factories and garages. The product range also has the option to install an emergency module and microwave sensor.




IP20



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK08
IP Rating	IP20
Materials	Housing polycarbonate
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

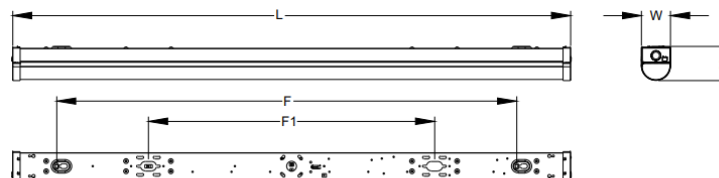

Product Range	Length(mm)	Width(mm)	Height (mm)	Fixing (mm)	Besa Boxes Fixing(mm)
4ft	1170	61	71	965	600
5ft	1470	61	71	1265	600
6ft	1734	61	71	1529	600

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK