
Flexi RF
Reliable RF Components In Stock

Datasheet

2.92mm Male Right Angle RF Connector for 0.047" Coax Cable | Solder Attachment | DC–40GHz

P/N: FR2-2.92-JWB1



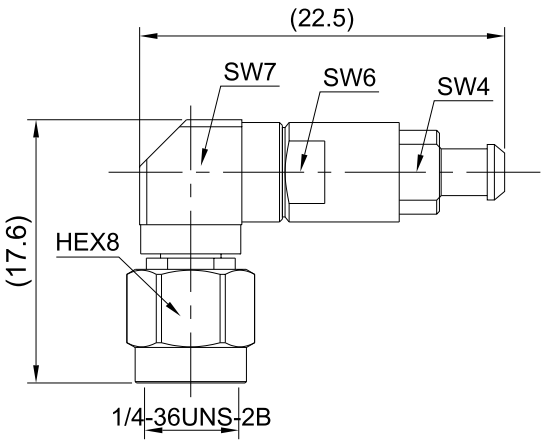

Dimensions are in mm

Product Configuration

Body Style	Right Angle
Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Male
Termination Type	Coax
Connector Impedance (Ohm)	50
Mount Method	None

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.35
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Stainless Steel
Body Plating	Passivated

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-65°C to +125°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com