
Datasheet

BMA Male Field Replaceable Connector | 4 Hole Flange | Hole Spacing 8.6mm | DC- 22GHz | Accepts 0.38mm Pin BMA-JFD0338



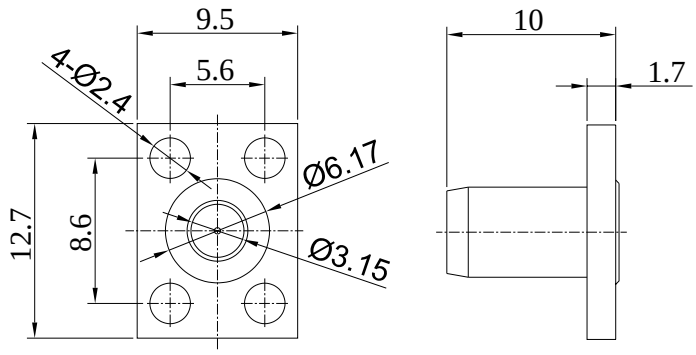

Dimensions are in mm

Product Configuration

Connector Series	BMA
Connector Polarity	Standard
Connector Gender	Male
Body Style	Straight
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	4 Hole Flange

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	CuSnZn

Electrical Specifications

Frequency	DC - 22GHz
VSWR / Return Loss	≤1.06+0.01xF(GHz)
Insertion Loss	≤ 0.03x Sqrt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-65℃ to +125℃

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com