


**BMA Male Field Replaceable Connector | 4 Hole Flange | Hole Spacing
8.6mm | DC-22GHz | Accepts 0.38mm Pin**

P/N: FR2-BMA-JFD0338

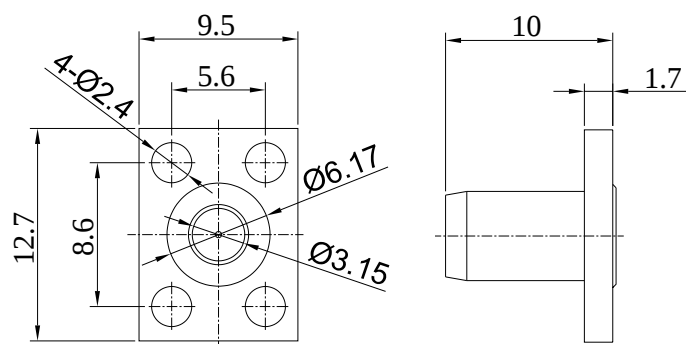

Dimensions are in mm

Product Configuration

Body Style	Straight
Connector Series	BMA
Connector Polarity	Standard
Connector Gender	Male
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	4 Hole Flange

Electrical Specifications

Frequency	DC - 22GHz
VSWR / Return Loss	$\leq 1.06 + 0.01 \times F(\text{GHz})$
Insertion Loss	$\leq 0.03 \times \text{Sqrt.}(f_{\text{GHz}})$

Mechanical Data

Min. Mating Cycles	≥ 500
Body Material	Brass
Body Plating	CuSnZn

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-65° to +125°