

Datasheet

WR-10 to 1.0mm Male Right Angle Waveguide to Coax Adapter with FUGP900 Flange | 73.8-112GHz

WR10/1.0-UG-J-V

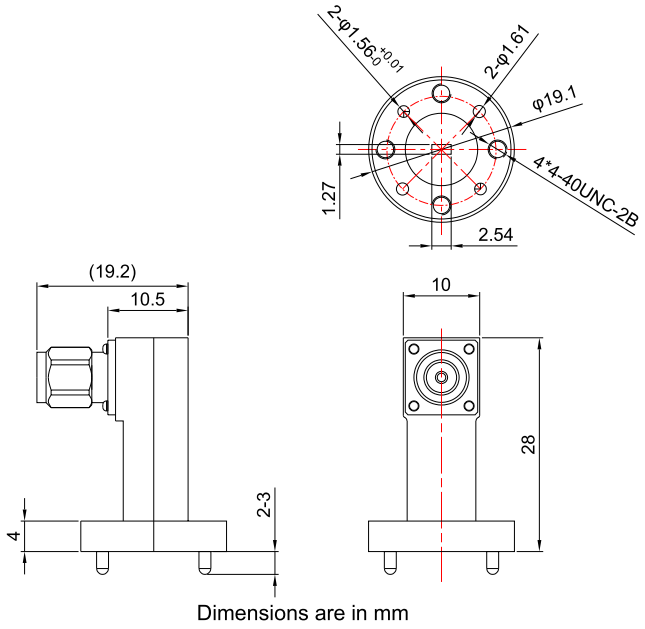

Dimensions are in mm



Product Configuration

Body Style	Right Angle
Flange Designation	FUGP900
Waveguide Size	WR-10
Connector Series	1.0mm
Connector Polarity	Standard
Connector Gender	Male
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	≤ 1.4
Insertion Loss	≤ 1.0dB
Frequency Range	73.8-112GHz

Mechanical Data

Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com