


## WR-112 to N Female Waveguide to Coax Adapter with UBR84 Flange | 6.57 - 9.99GHz

WR112/N-UBR84-K-V



Dimensions are in mm

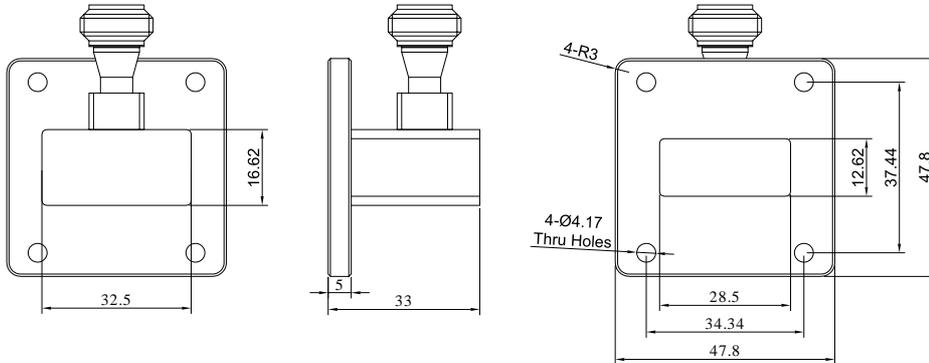

### Product Configuration

Body Style	Right Angle
Flange Designation	UBR84
Waveguide Size	WR-112
Connector Series	N
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

### Electrical Specifications

VSWR / Return Loss	1.15
Frequency Range	6.57-9.99GHz

### Mechanical Data

Weight (g)	68.3 g
Body Material	Aluminum

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C