


**WR-112 to SMA Female Waveguide to Coax Adapter with UBR84 Flange | WR112/SMA-UBR84-K-V**  
**6.57 - 9.99GHz**



Dimensions are in mm

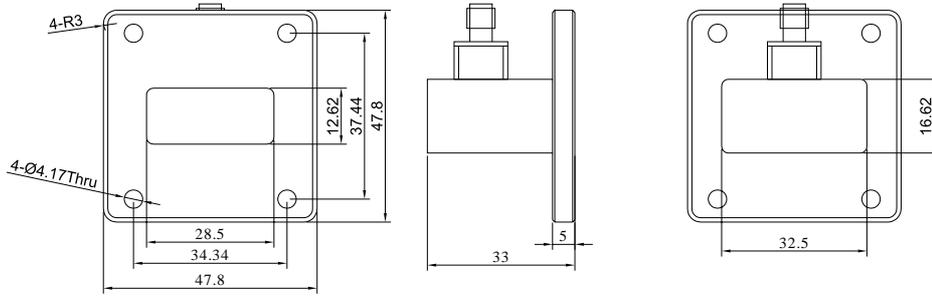

## Product Configuration

Body Style	Right Angle
Flange Designation	UBR84
Waveguide Size	WR-112
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

## Electrical Specifications

VSWR / Return Loss	1.25
Frequency Range	6.57-9.99GHz

## Mechanical Data

Weight (g)	56.8 g
Body Material	Aluminum

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C