



WR-12 to 1.0mm Female Right Angle Waveguide to Coax Adapter with FUGP740 Flange | 60.5-91.9GHz

WR12/1.0-UG-K-V

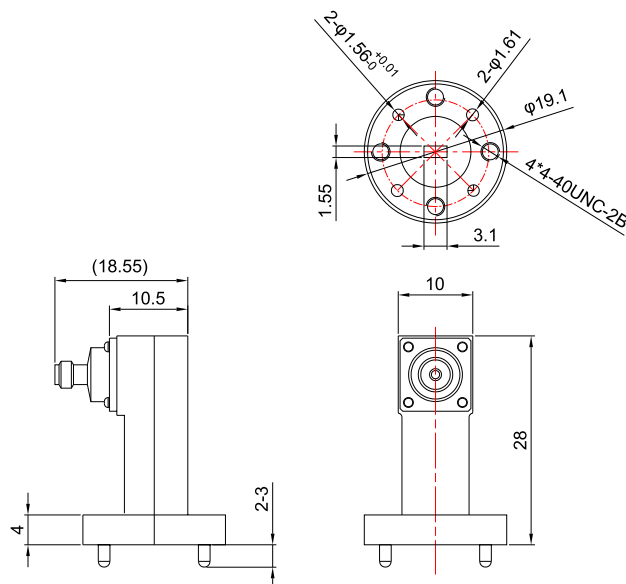

Dimensions are in mm



Product Configuration

Body Style	Right Angle
Waveguide Size	WR-12
Connector Series	1.0mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	≤ 1.5
Insertion Loss	≤ 1.0dB
Frequency Range	60.5-91.9GHz

Mechanical Data

Body Material	Brass
Body Plating	Gold

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C