
WR-137 to N Female Right Angle Waveguide to Coax Adapter with FDP70 Flange | 5.38 - 8.17GHz

WR137/N-K-V



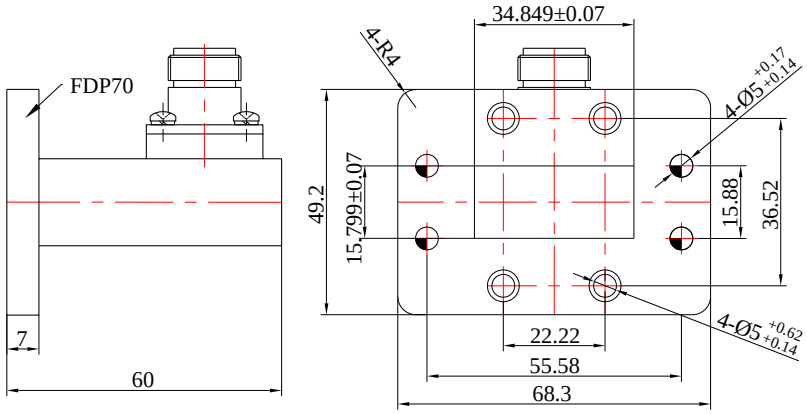

Dimensions are in mm

Product Configuration

Body Style	Right Angle
Flange Designation	FDP70
Waveguide Size	WR-137
Connector Series	N
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	1.25
Frequency Range	5.38 - 8.17GHz

Mechanical Data

Weight (g)	124 g
Body Material	Aluminum

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com