


## WR-137 to SMA Female Waveguide to Coax Adapter with UDR70 Flange | 5.38 - 8.17GHz

WR137/SMA-UDR70-K-V



Dimensions are in mm

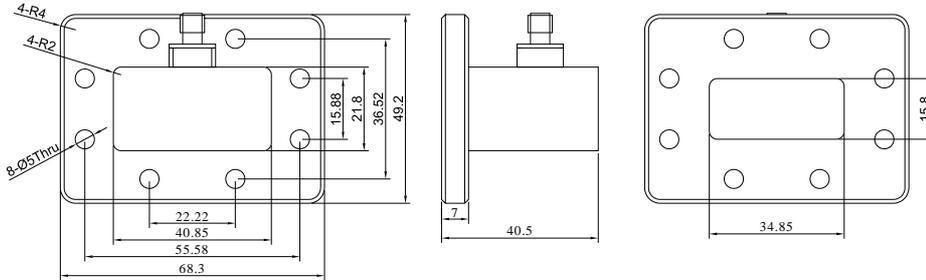

### Product Configuration

Body Style	Right Angle
Flange Designation	UDR70
Waveguide Size	WR-137
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

### Electrical Specifications

VSWR / Return Loss	1.25
Frequency Range	5.38-8.17GHz

### Mechanical Data

Weight (g)	92.8 g
Body Material	Aluminum

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C