



WR-15 to 1.0mm Female Right Angle Waveguide to Coax Adapter with FUGP620 Flange | 50-75GHz

WR15/1.0-UG-K-V

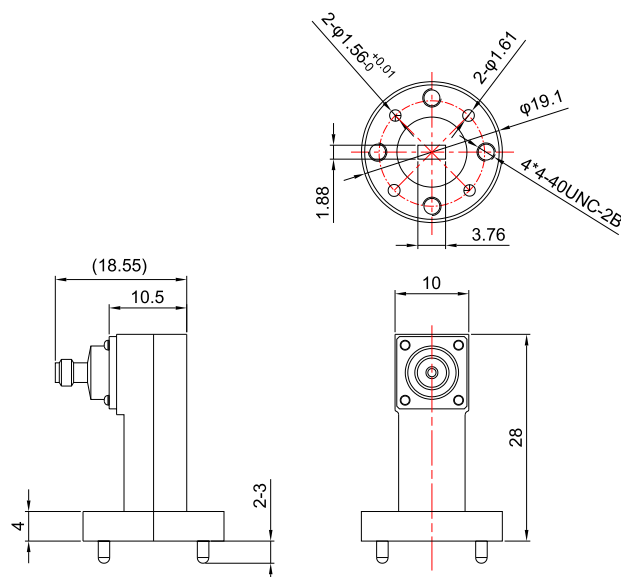

Dimensions are in mm



Product Configuration

Body Style	Right Angle
Flange Designation	FUGP900
Waveguide Size	WR-15
Connector Series	1.0mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	≤ 1.38
Insertion Loss	≤ 1.0dB
Frequency Range	50-75GHz

Mechanical Data

Body Material	Brass
Body Plating	Gold

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C