


**WR-187 to N Female Right Angle Waveguide to Coax Adapter with FDP48 Flange | 3.94 - 5.99GHz**

**WR187/N-K-V**



Dimensions are in mm

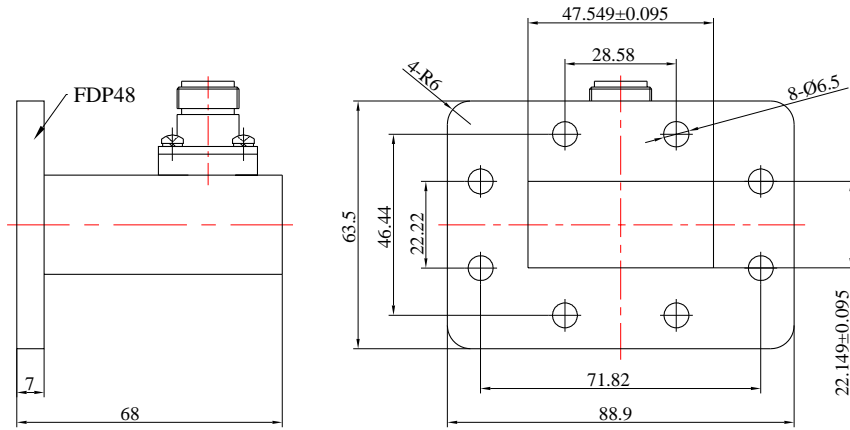

**Product Configuration**

Body Style	Right Angle
Flange Designation	FDP48
Waveguide Size	WR-187
Connector Series	N
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

**Electrical Specifications**

VSWR / Return Loss	1.25
Frequency Range	3.94 - 5.99GHz

**Mechanical Data**

Weight (g)	178 g
Body Material	Aluminum

**Environmental Specifications**

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C