
Datasheet

WR-187 to N Female Right Angle Waveguide to Coax Adapter with FDP48 Flange | 3.94 - 5.99GHz

WR187/N-K-V



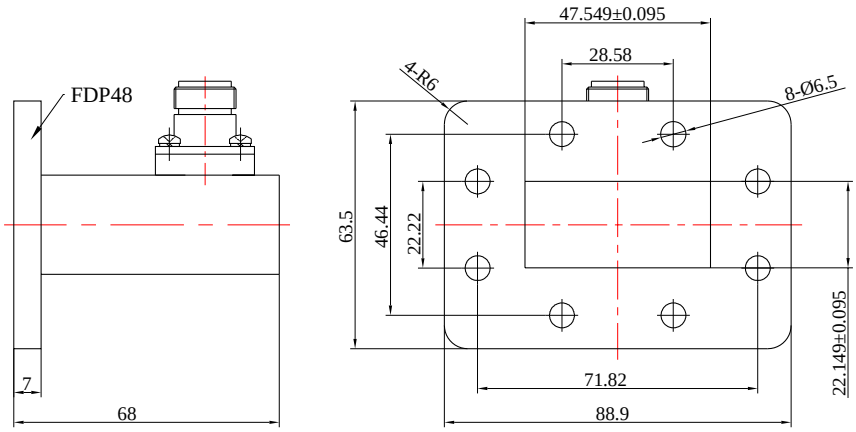

Dimensions are in mm

Product Configuration

Body Style	Right Angle
Flange Designation	FDP48
Waveguide Size	WR-187
Connector Series	N
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	1.25
Frequency Range	3.94 - 5.99GHz

Mechanical Data

Weight (g)	178 g
Body Material	Aluminum

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com