



WR-34 to 2.92mm Female Right Angle Waveguide to Coax Adapters with FBP260 Flange | 21.7 - 33GHz

WR34/2.92-K-V

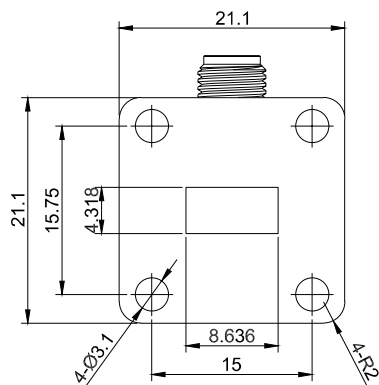

Dimensions are in mm

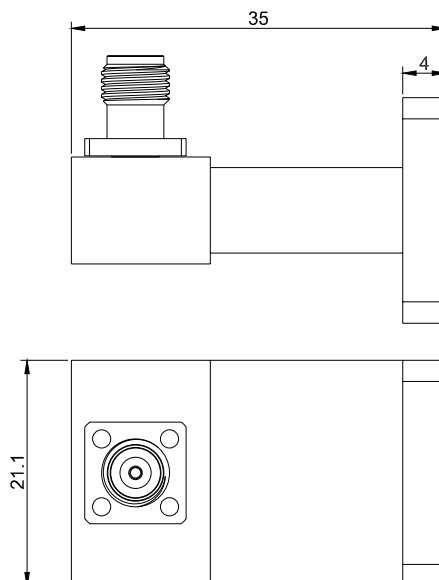

Product Configuration

Body Style	Right Angle
Flange Designation	FBP260
Waveguide Size	WR-34
Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	1.2 to 33GHz
Frequency Range	21.7GHz to 33GHz

Mechanical Data

Body Material	Brass
Body Plating	Paint

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C