
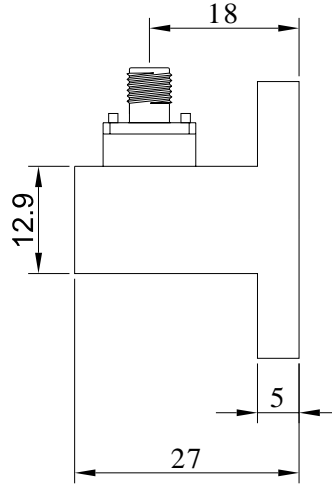


**WR-62 to SMA Female Right Angle Waveguide to Coax Adapter with UBR140 Flange | 11.9 - 18GHz**

**WR62/SMA-UBR140-K-V**

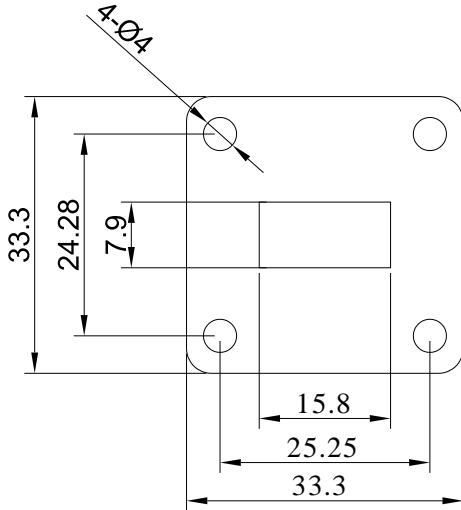

Dimensions are in mm

**Product Configuration**

Body Style	Right Angle
Flange Designation	UBR140
Waveguide Size	WR-62
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

**Electrical Specifications**

VSWR / Return Loss	1.25
Insertion Loss	≤ 0.25dB
Frequency Range	11.9-18GHz

**Mechanical Data**

Weight (g)	29.55 g
Body Material	Aluminum

**Environmental Specifications**

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +125°C