
WR-90 to SMA Female Right Angle Waveguide to Coax Adapter with UBR100 Flange | 8.2 - 12.4GHz

WR90/SMA-UBR100-K-V



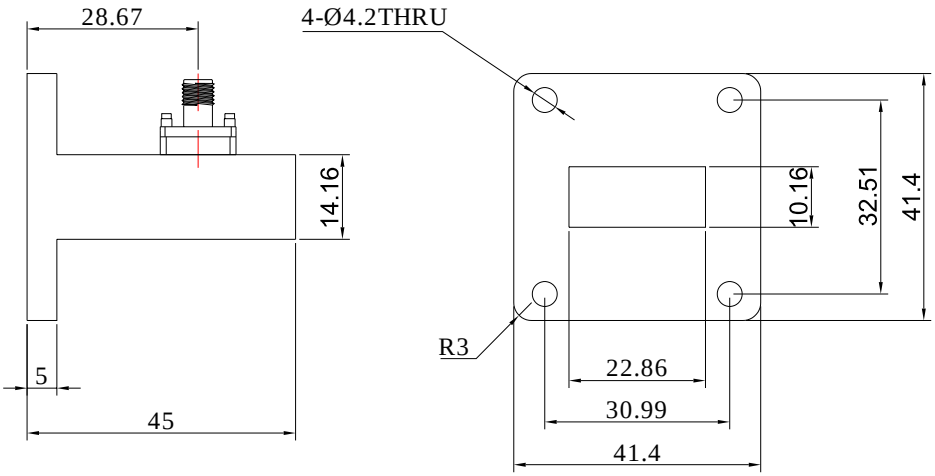

Dimensions are in mm

Product Configuration

Body Style	Right Angle
Flange Designation	UBR100
Waveguide Size	WR-90
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	1.25
Insertion Loss	≤ 0.25dB
Frequency Range	8.2-12.4GHz

Mechanical Data

Weight (g)	71.85 g
Body Material	Aluminum

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com