

# 2G TOGGLE + DIMMER / VERTICAL / LINEAR

ACTION: TOGGLE + DIMMER SWITCH

KNURL: LINEAR

RANGE: TOGGLE + DIMMER SWITCH

A 2G toggle (2-Way) + LED dimmer switch (100W) made from solid metal, featuring our NEW diamond-cut, linear knurl toggle arm & dimmer knob and torx cap details. The switch includes our new dimmer module with improved performance. This modular switch is designed for vertical installation, and the components will be delivered in separate boxes.












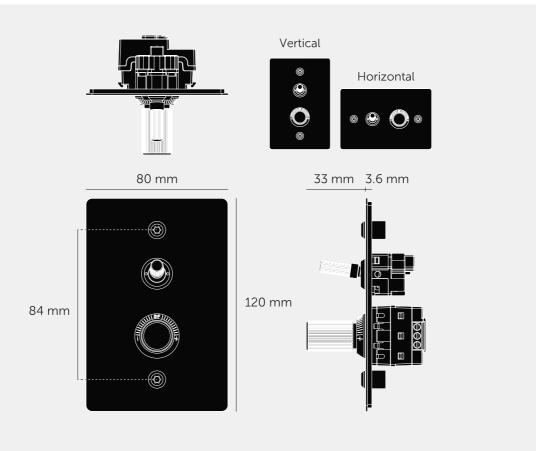

#### **SPECIFICATIONS**

Style: 1x On / Off Toggle Switch + 1 x Push On / Off Rotary

Dimmer

For Use In: Australia, Europe & New Zealand

Compatibility: For use with standard 1, 2  $\vartheta$  3 way switch circuits. Not compatible with Retractive Switching

TOGGLE MODULE Switching: 2 Way Input: 220-250VAC

Load: 10AX

Certification: SAA-240105-EA

Testing Includes: Endurance - 12,000 cycles @ 100% max load

Resistance to Heat - 125C

Dielectric Voltage Withstand - 2000V & 3000V

Not Suitable for Fans, Motors or any other type of large inductive load. Consult an Electrician for use with Contactors. Product has been tested with major Smart Home Modules using

Standard Switch inputs.

DIMMER MODULE Switching: 2 Way Input: 240VAC

Dimming Type: Auto Detect Trailing Edge & Leading Edge

Load: 10-250W - Incandescent / 2-100W - LED

Compliant with - AS 3133:2020

Certification: CE / EAC / SAA / UKCA BS EN60669-2-1, AS/NZS

60669.2.1, AS/NZS 60669.1

### FINISH & SKU NUMBERS

THIST O SKO KOMBEKS		
sku:	finish:	size:
ZMK-024576	black	2G
ZMK-054577	brass	2G
ZMK-454578	smoked bronze	2G
ZMK-074579	steel	2G
ZMK-144580	white	2G

## CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

#### INCLUDED

- 1 x 2G Wall Plate
- 1 x 2 Way Toggle Module
- 1 x Toggle Detail Kit 1 x 100W Dimmer Module
- 1 x Dimmer Detail Kit
- 1 x Plate Detail Kit

# PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.