

## **BUSTER BULB / E27**

---

**ACTION: E27 SCREW**


---

**RANGE: LIGHTING**

---

The World's first designer LED bulb. This bulb has a life span of 35,000 hours. Available in Crystal, Gold or Smoked finish. The resin light pipe at the centre of the bulb is where all the magic happens, allowing the bulb to create a subtle ambient light whilst at the same time throw focused spot light onto tables & surfaces below. The bulb fits in any E27 screw light fitting, but looks especially great when teamed up with our Heavy Metal or Hooked lighting ranges. Please refer to the Tech Spec for bulb wattage.



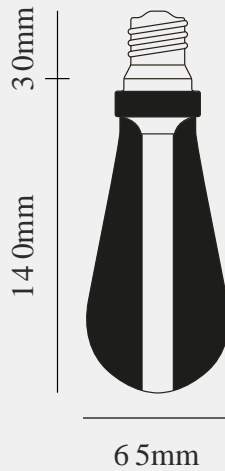

## SPECIFICATIONS

Buster Bulb Common Data (Dimmable & Non-Dimmable)  
 Frequency: 50/60 Hz  
 Current: 18 mA  
 Power Factor: 0.8  
 Lifetime\*: 35,000 hrs  
 Weight: 110 g  
 CCT: Crystal 2600K, Gold 2500K, Smoked 2600K  
 Please see below for individual bulb specification values

Buster Bulb: 2W Non-dimmable  
 Supply: 100-240 V AC  
 Luminous Flux: Crystal 115, Gold 95, Smoked 70  
 CRI: Crystal 83, Gold 80, Smoked 83

Buster Bulb: 2W Dimmable  
 Supply: 220-240 V AC  
 Luminous Flux: Crystal max 100, Gold max 90, Smoked max 60  
 CRI: Crystal 82, Gold 80, Smoked 84

Buster Bulb: 5W Dimmable (Gold SKU BB-TD-E27-D-GO-C only)  
 Supply: 220-240 V AC  
 Luminous Flux: Gold max 200  
 CRI: Gold 80

## FINISH & SKU NUMBERS

| sku:              | finish:   | size:                |
|-------------------|-----------|----------------------|
| BB-TD-E27-ND-SM-B | ● smoked  | Non-dimmable<br>(2W) |
| BB-TD-E27-ND-GO-B | ● gold    | Non-dimmable<br>(2W) |
| BB-TD-E27-ND-CR-B | ● crystal | Non-dimmable<br>(2W) |
| BB-TD-E27-D-GO-C  | ● gold    | Dimmable (5W)        |
| RBBD-093501       | ● smoked  | Dimmable (2W)        |
| RBBD-133500       | ● gold    | Dimmable (2W)        |
| RBBD-123499       | ● crystal | Dimmable (2W)        |
| GBBD-093504       | ● smoked  | Dimmable (2W)        |

## INCLUDED

1 x Buster Bulb

## PLEASE NOTE

**Buster Bulb: 2W Non-dimmable**  
 The non-dimmable LED BULB is only compatible with on/off switches. If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains operated at 240V AC. To avoid disappointment, please ensure a compatible smart module is fitted before purchase. CE and UKCA marked.\*\*

**Buster Bulb: 2W Dimmable**  
 The dimmable LED BUSTER BULB requires a LED-compatible dimmer switch, like the Buster + Punch Premium dimmer switch. They can also be used with on/off switches. If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains operated at 240VAC. To avoid disappointment, please ensure a compatible smart module is fitted before purchase. CE marked.\*\*

\*This product is specifically designed and developed for domestic use in normal conditions and operation only. The lifetime mentioned on the packaging is an average only. This product comes with 2 years warranty.  
 \*\*Official data document can be supplied upon request.

## CARE INSTRUCTIONS

Wipe with a dry, lint-free cloth with no loose hairs, avoid using any chemicals. Ensure the bulb is switched off and cold before cleaning.

