

**2G DIMMER / 120W /  
CROSS / BRASS**

---

**ACTION: 2-WAY DIMMER**

---


**KNURL: CROSS**


---

**RANGE: DIMMER SWITCHES**

---

Experience the perfect blend of functionality and aesthetics with our dimmer switches. Designed to enhance the ambiance of your space, these switches allow you to effortlessly adjust the brightness of your lights, creating exquisite and relaxing environments in both commercial and residential spaces. Take control of your lighting and transform any room into a personalized sanctuary with our exceptional dimmer switches.

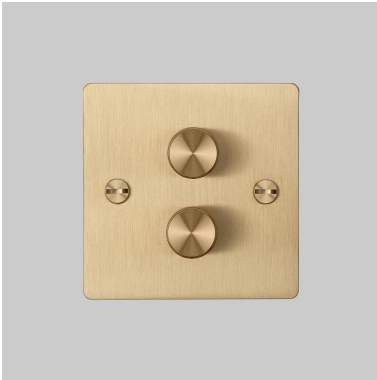

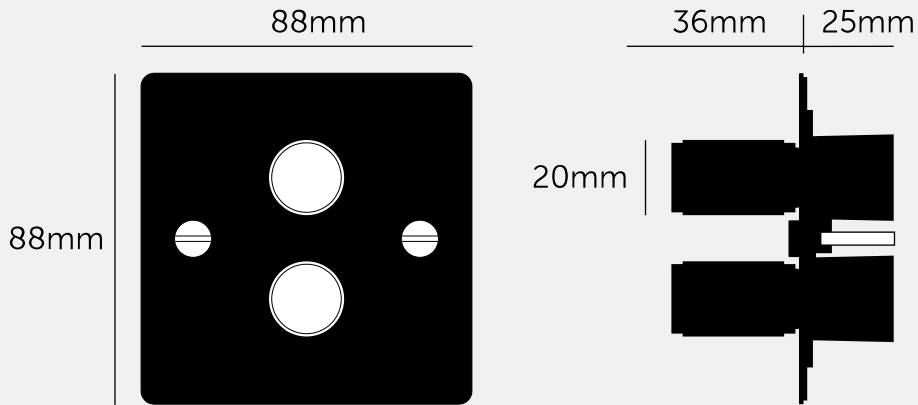


---

#### SPECIFICATIONS

---

Solid metal switch plate with 2 dimmer modules, in our signature brass finish.

Module: UK-DI-MO-LED-A  
 Style: Push On/Off Rotary Dimmer  
 Dimming Type: Trailing edge (native, default) and leading edge (simulated)  
 Input: 230-240 VAC 50Hz  
 Load: LED 5-120W / HAL/INC 60-400W per gang  
 Intelligent soft-start  
 BS EN 60669-2-1  
 Certified for use in UK, Europe and EAEU:  
 UKCA / CE / EAC

For use with standard 2-way and 3-way wiring accessories. Maximum one dimmer module per circuit.

Not compatible with retractive switches and Buster + Punch multipoint dimmers.

Not compatible with non-dimmable lamps & fixtures, compact fluorescent lamps (CFLs) or electric motors (e.g. fans).

Not compatible with native TRIAC (leading edge) dimmable drivers.

Suitable for use with good quality ELV electronic drivers only. Certain transformers & drivers may not behave according to their power rating when used with a dimmer. In case of issues, change your driver(s), remove one or more driver from the circuit.

The dimmer switch incorporates a soft-start feature, which may result in a 1–2 second delay before full illumination to reduce inrush current and extend lamp life.

Note: rotary action is smooth and silent during operation.

Compatible with UK standard 1G electricity back boxes (60.3mm screw spacing). See dimensions of chosen module for required backbox depth. Box must be flush mounted.

---

#### INCLUDED

---

- 1 x 2G Dimmer
- 1 x 2G Detail Kit
- 2 x 40mm Screws
- 2 x Coin Caps

---

#### PLEASE NOTE

---

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.

---

#### CARE INSTRUCTIONS


---

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

---

#### FINISH & SKU NUMBERS

---

sku	finish	size
UK-DI-CO-2G-LED-BR-A	 brass	2G