



1G DIMMER / INCANDESCENT / CROSS / WITHOUT


ACTION: ROTARY DIMMER

KNURL: CROSS

RANGE: DIMMER SWITCHES

A solid metal dimmer switch paired with our Standard Dimmer Module, designed specifically for incandescent and halogen lighting circuits. The switch features our signature diamond-cut knurled dimmer arm for a satisfying push-on, rotary-dimming action. It's finished with a sleek flat plate and our signature solid metal coin screws, and is available in five distinct finishes. You can also team it with our toggle switches, duplex outlets and USB outlets in matching finishes for a fully cohesive look.

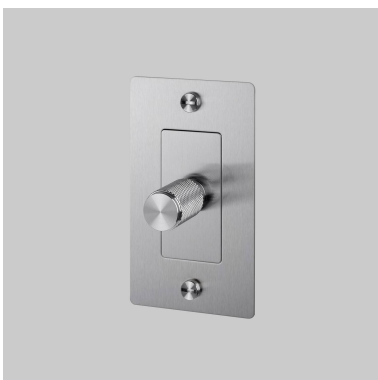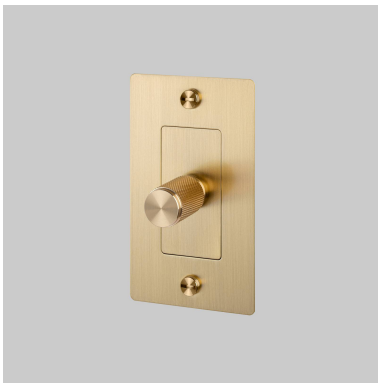

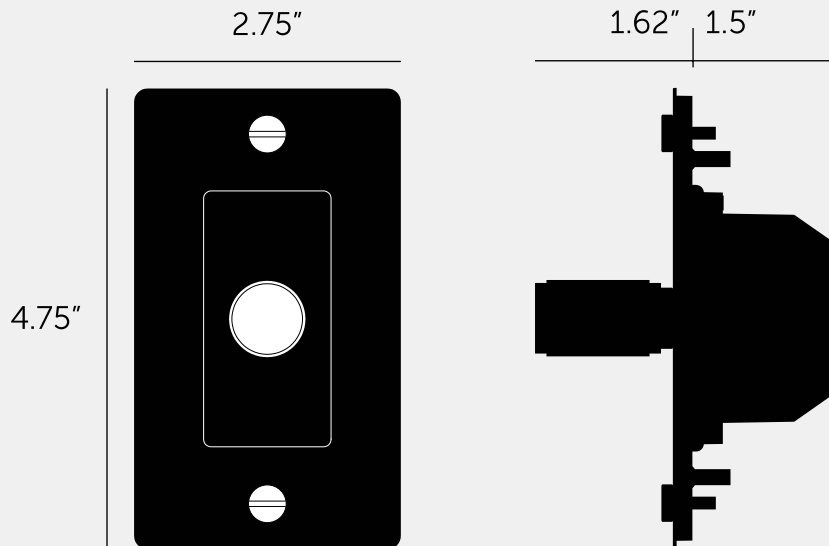

SPECIFICATIONS

Our Metal Electricity range has solid stainless steel plates, in our signature white, steel, brass, smoked bronze and black finishes.

Module: NDM-01385 (BP-VR600US)
Incandescent Dimmer Module
Style: Push ON/OFF Rotary Dimmer with 3 way switching
Input: 100 - 120V AC 60 HZ
Dimming Type: Leading Edge
Load: 600W max. HAL / INC - 150W max LED
Operating Temperature: 0° - 35°C / 32° - 89.6°F
Humidity: 10 - 90% R.H.
Certifications: cETLus 5008883

Compatible with 3-Way & 4-Way switches. Not compatible with retractive switches. Not compatible with non-dimmable lamps & fixtures, electric motors or fans.
Testing includes:
Overload - 100 cycles @ 150% max load
Endurance - 10,000 cycles @ 100% max load
Dielectric Voltage Withstand - 1500V

note: rotary action is smooth and silent during operation.
The dimmer switch incorporates a soft-start feature, which may result in a 1-2 second delay before full illumination to reduce inrush current and extend lamp life.

Recommended Electrical Box: standard 1G electrical box. Box must be flush mounted.
This piece features a 1/8" (4mm) shadow gap when installed.

FINISH & SKU NUMBERS

sku:	finish:	size:
NDK-023796	● black	1G
NDK-053800	● brass	1G
NDK-093797	● smoked bronze	1G
NDK-073798	● steel	1G
NDK-143799	● white	1G
NDK-134887	● black / warm sunset	1G

INCLUDED

1 x 1G Wall Plate
1 x Incandescent Dimmer Module
1 x Cross Dimmer Detail Kit

PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.

CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.