

**3G DIMMER / LED /  
LINEAR / WITHOUT  
LOGO**

---

**ACTION: DIMMER SWITCH**

---

**KNURL: LINEAR**

---


**RANGE: DIMMER SWITCHES**

---

A solid metal dimmer switch with our new linear knurled knob designed to feel exceptional with every touch. It can be used on lighting circuits that power dimmable LED, incandescent or halogen bulbs, offering smooth, reliable control across multiple lamp types.

The dimmer is finished with a flat plate and our signature solid metal coin or torx screws, and is available in five different finishes. You can also pair it with our toggle switches, duplex outlets and USB outlets in matching finishes for a cohesive look throughout your space.



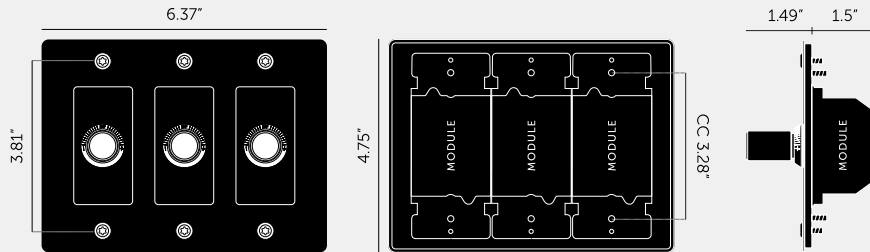


---

#### SPECIFICATIONS

---

Our Metal Electricity range has solid stainless steel plates, in our signature white, steel, brass, smoked bronze and black finishes.

Module: NDM-024061  
 LED Dimmer Module  
 Style: Push ON/OFF Rotary Dimmer  
 Input: 100-120VAC 60 Hz  
 Dimming Type: Trailing and leading edge (auto-detect & user override)  
 Load: LED 5-250W / HAL/INC 10-300W per gang  
 Operating Temperature: 32° - 95°F / 0° - 35°C  
 Humidity: 10 - 90% R.H.  
 Certifications: cETLus 5008883  
 Compatible with 3-Way & 4-Way Switches. Not Compatible with Retractive Switches. Not Compatible with non-dimmable lamps & fixtures, compact florescent lamps (CFLs), electric motors or fans.  
 Not compatible with Magnetic Low Voltage (MLV) lighting systems and drivers.  
 Testing includes:  
 Overload - 100 cycles @ 150% max load  
 Endurance - 10,000 cycles @ 100% max load  
 Dielectric Voltage Withstand - 1500V

note: rotary action is smooth and silent during operation.  
 The dimmer switch incorporates a soft-start feature, which may result in a 1-2 second delay before full illumination to reduce inrush current and extend lamp life.

---

#### FINISH & SKU NUMBERS

---

sku:	finish:	size:
NDK-024325	● black	3G
NDK-424326	● brass	3G
NDK-094327	● smoked bronze	3G
NDK-074328	● steel	3G
NDK-144329	● white	3G

---

#### INCLUDED

---

1 x 3G Wall Plate  
 3 x LED Dimmer Module  
 3 x Dimmer Detail Kit

---

#### PLEASE NOTE

---

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.

---

#### CARE INSTRUCTIONS

---

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.