

SMART BLE MICROWAVE STEP DIMMING SENSOR FOR ORWELL/BURWELL HIGH

NET-23-12-74



Features & Benefits

- Ø16-18m detection range
- 12m max. mounting height
- Compatible with Orwell Multi-Wattage High Bays
- IP65 rated housing
- Memory function
- Intelligent photocell to measure and differentiate natural light from LED light

Key Data

IP Rating	IP65
Dimensions	Ø57 x 40.8 x Ø36.5mm
Warranty	3 Years

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Driver Output Voltage (DC)	12-24V
Operating Temp.	-20°C to +70°C
Manufacturer	Fox Lux
Max. Detection Distance	∅16-18m
Max. Mounting Height	12m
Housing Colour	Black
Housing Material	PC
Max. Detection Area	∅16-18m
Sensor IP Rating	IP65

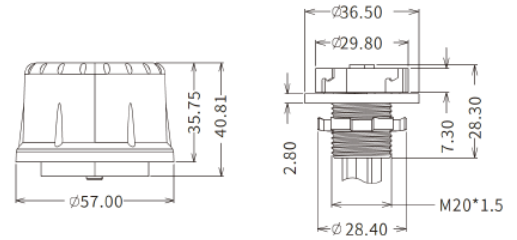

Other Options

Description	
NET-23-12-74	Smart BLE Microwave Step Dimming Sensor for Orwell/Burwell High Bays

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk