



## DUXFORD BULKHEAD TRI-COLOUR IP65 16W MICROWAVE SENSOR EMERGENCY

NET-33-06-34

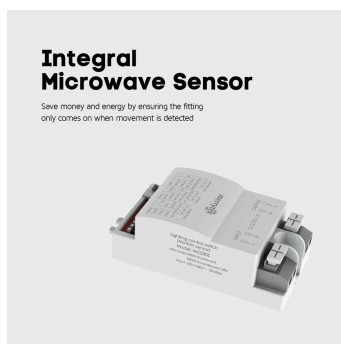

### Features & Benefits

- Detection range from 2m to 10m
- Hold time from 5 seconds to 10 minutes
- Daylight threshold
- Corridor function 0% or 10%
- Maintained or non-maintained Emergency operation
- Selectable 3000K, 4000K or 5500K colour temperature

### Key Data

Power	16W
Luminous Flux	1300lm/1550lm/1400lm
Colour Temperature	3000K/4000K/5500K
IP Rating	IP65
Dimensions	Ø325 x 110mm
Warranty	3 Years

### Compatible Accessories

NET-51-04-59	Photocell Kit for Outdoor Lighting
NET-33-06-06	Chrome Ring for Duxford Bulkheads
NET-33-06-08	Black Ring for Duxford Bulkheads

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	96lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	52
Driver Manufacturer	Merrytek
Driver Output Voltage (DC)	36-42V
Total Circuit Power (W)	16W +/- 1.5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Operating Temp.	0°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	More than 19
Weight	1.13Kg
Manufacturer	NET LED Lighting
Fire Rating	V2
Luminous Flux Factor	5%
Self Test	No
Housing Colour	White
Housing Material	Polycarbonate
Battery Pack	Li-on 3.7V
Diffuser Material	Polycarbonate
Emergency Kit	1 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer
Sensor IP Rating	IP20

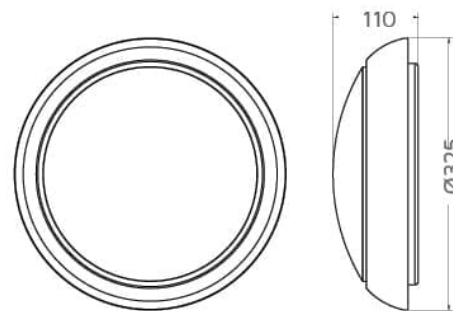

## Other Options

Description		
NET-33-06-20	Yes	Duxford Bulkhead Tri-Colour IP65 16W Standard
NET-33-06-30		Duxford Bulkhead Tri-Colour IP65 16W Emergency
NET-33-06-34		Duxford Bulkhead Tri-Colour IP65 16W Microwave Sensor Emergency
NET-33-06-70		Duxford Bulkhead Tri-Colour IP65 16W Photocell
NET-33-06-24		Duxford Bulkhead Tri-Colour IP65 16W Microwave Sensor
NET-33-06-71		Duxford Bulkhead Tri-Colour IP65 16W Photocell Emergency
NET-33-06-25		Duxford Bulkhead Tri-Colour IP65 16W Self Test Emergency
NET-33-06-27		Duxford Bulkhead Tri-Colour IP65 16W Microwave Sensor Self Test Emergency
NET-33-06-48		Duxford Bulkhead Tri-Colour IP65 16W Photocell Microwave Sensor
NET-33-06-49		Duxford Bulkhead Tri-Colour IP65 16W Photocell Microwave Sensor Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

## SHATTERPROOF POLYCARBONATE DIFFUSER

Prevents the fitting from breaking into multiple small pieces

## IP65 RATED HOUSING

Protect your bulkhead from water and dust

## LITHIUM ION BATTERY

Requires little maintenance and has a long lifespan

*Emergency options only*

## PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

## DUSK TO DAWN FUNCTION

Detects ambient light levels and adjusts the light accordingly

*Photocell options only*

3K

4K

5.5K

## SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature  
3000K, 4000K or 5500K

## INTEGRAL MICROWAVE SENSOR

Featuring a 0 or 10% Standby  
Mode, 2-10m detection range  
and 5sec to 10min hold time

*Microwave Sensor options only*



## SUITABLE FOR BESA BOX INSTALLATION

Save time on site with  
pre-made cable entry points