


FOXTON BATTEN TRI-COLOUR 1800MM (6FT) 35W PIR SENSOR ON/OFF EMERGENCY

NET-41-11-63

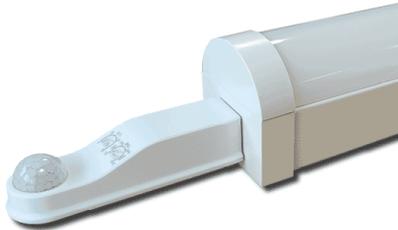

External On/Off PIR Sensor

Save energy costs with a fitting that only comes on when heat signatures are detected



3 Hour Emergency operation

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure



Features & Benefits

- 3H Emergency function
- On/Off PIR Sensor ensures the fitting only comes on when heat signatures are detected
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation

Key Data

Power	35W
Luminous Flux	4550lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP20
IK Rating	IK04
Dimensions	1820 x 63 x 73mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-04	Universal LED NCF / Batten Suspension Kit
--------------	---

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	352
Driver Manufacturer	Tridonic Advanced Series
Driver Output Voltage (DC)	20-54V
Total Circuit Power (W)	35W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Lux Levels	<3lux-2000lux (adjustable)
Self Test	No
Housing Colour	White
Housing Material	Steel
Battery Pack	LiFePO4
Detection Angle	360°
Diffuser Material	Polycarbonate
Duration	10s-30min
Emergency Kit	3 Year Warranty

Other Options

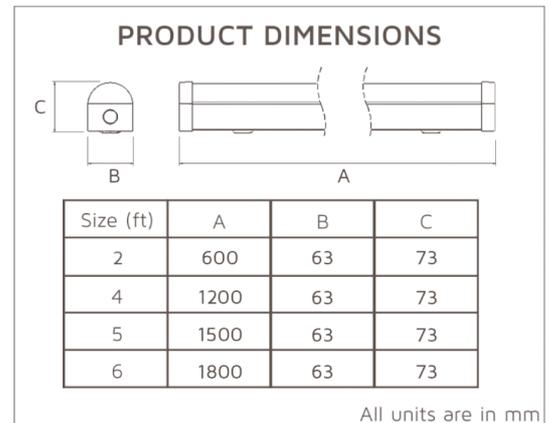

Description	
NET-41-11-97 Emergency Pack	Streamer Foxton Batten Tri-Colour 1800mm (6ft) 35W Standard
NET-41-11-98 Sensor Manufacturer	Sealite Co. Ltd. Foxton Batten Tri-Colour 1800mm (6ft) 35W Emergency
NET-41-11-98 Sensor Rating	IP65 Foxton Batten Tri-Colour 1800mm (6ft) 35W Self Test Emergency
NET-41-11-15	Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable one4all
NET-41-11-16	Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable Emergency
NET-41-11-61	Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable DALI Emergency
NET-41-11-62	Foxton Batten Tri-Colour 1800mm (6ft) 35W PIR Sensor On/Off
NET-41-11-63	Foxton Batten Tri-Colour 1800mm (6ft) 35W PIR Sensor On/Off Emergency
NET-41-11-64	Foxton Batten Tri-Colour 1800mm (6ft) 35W Microwave Sensor On/Off
NET-41-11-65	Foxton Batten Tri-Colour 1800mm (6ft) 35W Microwave Sensor On/Off Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

powered by

TRIDONIC

3K

4K

5.7K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature
3000K, 4000K or 5700K

COMBINED DIFFUSER AND LEDS

Stop juggling multiple parts
and install a diffuser that comes
with built-in LEDs

PUSH CONNECTOR

Reduce installation time with
easy-to-use push fit terminals

REAR OR END CABLE ENTRY

Create seamless
end-to-end lighting designs

TRIDONIC ADVANCED 2 DRIVER
AS STANDARD