
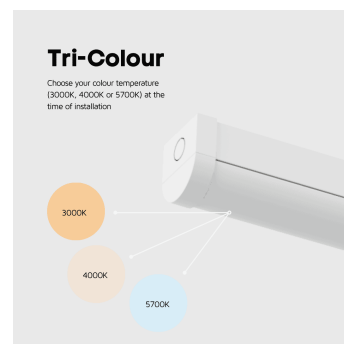


FOXTON BATTEN TRI-COLOUR 600MM (2FT) 10W EMERGENCY

NET-41-11-69



Features & Benefits

- 3H Emergency function
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation
- Diffuser comes with built-in LEDs

Key Data

Power	10W
Luminous Flux	1300lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP20
IK Rating	IK04
Dimensions	670 x 63 x 73mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-33-04	DALI Emergency Kit 3W/6W
NET-42-43-38	Merrytek Microwave Sensor IP65 20mm Knock Out
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-51-11-01	PIR Sensor (External) for Battens and NCFs
NET-51-11-03	On/Off Step Dimming Sensor (External) for Battens and NCFs

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	120
Driver Manufacturer	Tridonic Advanced Series
Driver Output Voltage (DC)	14-29V
Total Circuit Power (W)	10W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	0.830Kg
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Self Test	No
Housing Colour	White
Housing Material	Steel
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

Other Options

PRODUCT DIMENSIONS

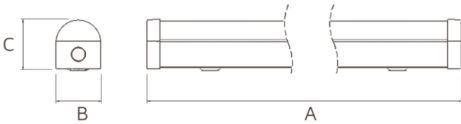

Size (ft)	A	B	C
2	600	63	73
4	1200	63	73
5	1500	63	73
6	1800	63	73

All units are in mm

Description	
NET-41-11-68	Foxton Batten Tri-Colour 600mm (2ft) 10W Standard
NET-41-11-69	Foxton Batten Tri-Colour 600mm (2ft) 10W Emergency
NET-41-11-70	Foxton Batten Tri-Colour 600mm (2ft) 10W PIR Sensor On/Off
NET-41-12-70	Foxton Batten Tri-Colour 600mm (2ft) 10W PIR Sensor On/Off Emergency
NET-41-11-71	Foxton Batten Tri-Colour 600mm (2ft) 10W Microwave Sensor On/Off
NET-41-12-71	Foxton Batten Tri-Colour 600mm (2ft) 10W Microwave Sensor On/Off Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

130
lm/W



**SELECTABLE
COLOUR
TEMPERATURE**

Choose your colour temperature
3000K, 4000K or 5700K

**COMBINED DIFFUSER
AND LEDS**

Stop juggling multiple parts
and install a diffuser that comes
with built-in LEDs

PUSH CONNECTOR

Reduce installation time with
easy-to-use push fit terminals

**REAR OR END
CABLE ENTRY**

Create seamless
end-to-end lighting designs

**TRIDONIC DRIVER
AS STANDARD**

Ensure reliability, durability and
performance leading to
long-lasting LEDs

