


FOXTON BATTEN TRI-COLOUR 600MM (2FT) 10W MICROWAVE SENSOR ON/OFF

NET-41-12-71

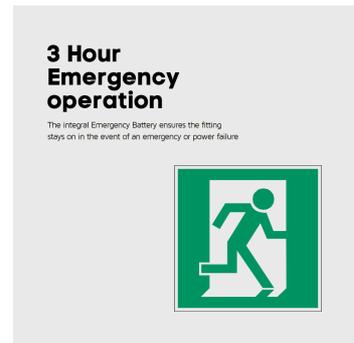

Features & Benefits

- 3H Emergency function
- On/Off Microwave Sensor ensures the fitting only comes on when movement is detected
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation

Key Data

Power	10W
Luminous Flux	1300lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP20
IK Rating	IK04
Dimensions	670 x 63 x 73mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-04	Universal LED NCF / Batten Suspension Kit
--------------	---

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	120
Driver Manufacturer	Tridonic Advanced Series
Driver Output Voltage (DC)	14-29V
Total Circuit Power (W)	10W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Lux Levels	5lux-150lux or Disabled
Max. Detection Distance	12m
Self Test	No
Housing Colour	White
Housing Material	Steel
Battery Pack	LiFePO4
Detection Angle	150° (wall mount) / 360° (ceiling mount)
Diffuser Material	Polycarbonate
Duration	5s-30min
Emergency Kit	3 Year Warranty

Other Options

Description	
Emergency Pack	Streamer Foxton Batten Tri-Colour 600mm (2ft) 10W Standard
Sensor Manufacturer	Merrytek Foxton Batten Tri-Colour 600mm (2ft) 10W Emergency
Sensor IP Rating	IP20 Foxton Batten Tri-Colour 600mm (2ft) 10W PIR Sensor On/Off
NET-41-11-68	Foxton Batten Tri-Colour 600mm (2ft) 10W PIR Sensor On/Off Emergency
NET-41-11-71	Foxton Batten Tri-Colour 600mm (2ft) 10W Microwave Sensor On/Off
NET-41-12-71	Foxton Batten Tri-Colour 600mm (2ft) 10W Microwave Sensor On/Off Emergency

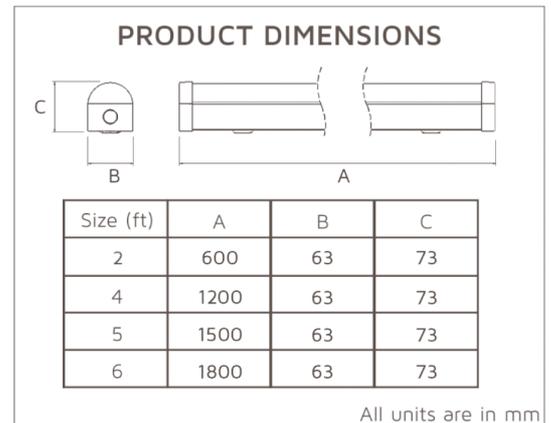

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

powered by

TRIDONIC



3K

4K

5.7K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature
3000K, 4000K or 5700K

COMBINED DIFFUSER AND LEDS

Stop juggling multiple parts
when installing with a diffuser
that comes with built-in LEDs

PUSH CONNECTOR

Reduce installation time with
easy-to-use push fit terminals

REAR OR END CABLE ENTRY

Create seamless
end-to-end lighting designs

FLICKER-FREE TRIDONIC DIMMABLE DRIVER

one4all Dimming DALI 1 & 2
and switchDIM (Push) options

**TRIDONIC PREMIUM
DIMMABLE DRIVER**
ON DIMMABLE OPTIONS

