


## FOXTON BATTEN TRI-COLOUR 1800MM (6FT) 35W SELF TEST EMERGENCY

NET-41-12-98

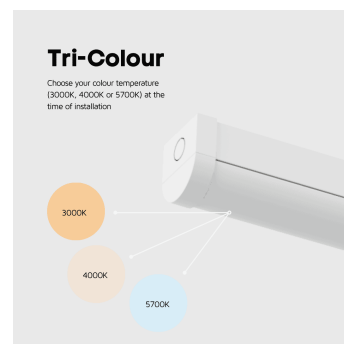

### Features & Benefits

- Self Test Emergency function
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation
- Diffuser comes with built-in LEDs

### Key Data

|                           |                                 |
|---------------------------|---------------------------------|
| <b>Power</b>              | 35W                             |
| <b>Luminous Flux</b>      | 4550lm                          |
| <b>Colour Temperature</b> | 3000K/4000K/5700K               |
| <b>IP Rating</b>          | IP20                            |
| <b>IK Rating</b>          | IK04                            |
| <b>Dimensions</b>         | 1820 x 63 x 73mm                |
| <b>Warranty</b>           | 5 Years (Registration Required) |

### Compatible Accessories

|              |  |
|--------------|--|
| NET-42-43-38 | Merrytek Microwave Sensor IP65 20mm Knock Out              |
| NET-46-16-04 | Universal LED NCF / Batten Suspension Kit                  |
| NET-51-11-01 | PIR Sensor (External) for Battens and NCFs                 |
| NET-51-11-03 | On/Off Step Dimming Sensor (External) for Battens and NCFs |

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)




**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

|                            |                          |
|----------------------------|--------------------------|
| Input Voltage (AC)         | 220-240V                 |
| Power Factor               | >0.90                    |
| Luminaire Efficacy         | 130lm/W                  |
| LED Manufacturer           | Jingrui                  |
| LED Type                   | SMD 2835                 |
| No. of LEDs                | 352                      |
| Driver Manufacturer        | Tridonic Advanced Series |
| Driver Output Voltage (DC) | 20-54V                   |
| Total Circuit Power (W)    | 35W                      |
| Electrical Class           | 1                        |
| Colour Rendering           | >80 CRI                  |
| Lamp Viewing Angle         | 120°                     |
| Dimmable                   | No                       |
| Flicker-Free               | Yes                      |
| Operating Temp.            | 0°C to +45°C             |
| Lifespan LM80              | 50,000 Hours             |
| UGR Rating                 | More than 22             |
| Weight                     | 2.070Kg                  |
| Manufacturer               | Senselight               |
| Fire Rating                | V2                       |
| Hours Maintained           | 3H                       |
| Self Test                  | Yes                      |
| Housing Colour             | White                    |
| Housing Material           | Steel                    |
| Battery Pack               | LiFePO4                  |
| Diffuser Material          | Polycarbonate            |
| Emergency Kit              | 3 Year Warranty          |
| Emergency Operation        | >3H                      |
| Emergency Pack             | Streamer                 |

## Other Options

## PRODUCT DIMENSIONS

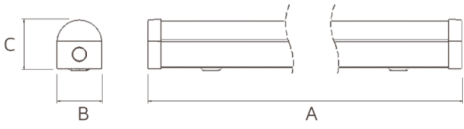

| Size (ft) | A    | B  | C  |
|-----------|------|----|----|
| 2         | 600  | 63 | 73 |
| 4         | 1200 | 63 | 73 |
| 5         | 1500 | 63 | 73 |
| 6         | 1800 | 63 | 73 |

All units are in mm

| Description  |   |
|--------------|---|
| NET-41-11-97 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Standard                          |
| NET-41-11-98 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Emergency                         |
| NET-41-12-98 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Self Test Emergency               |
| NET-41-11-15 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable one4all                  |
| NET-41-11-16 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable Emergency                |
| NET-41-11-61 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Dimmable DALI Emergency           |
| NET-41-11-62 | Foxton Batten Tri-Colour 1800mm (6ft) 35W PIR Sensor On/Off                 |
| NET-41-11-63 | Foxton Batten Tri-Colour 1800mm (6ft) 35W PIR Sensor On/Off Emergency       |
| NET-41-11-64 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Microwave Sensor On/Off           |
| NET-41-11-65 | Foxton Batten Tri-Colour 1800mm (6ft) 35W Microwave Sensor On/Off Emergency |

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY



**SELECTABLE  
COLOUR  
TEMPERATURE**

Choose your colour temperature  
3000K, 4000K or 5700K

**COMBINED DIFFUSER  
AND LEDS**

Stop juggling multiple parts  
and install a diffuser that comes  
with built-in LEDs

**PUSH CONNECTOR**

Reduce installation time with  
easy-to-use push fit terminals

**REAR OR END  
CABLE ENTRY**

Create seamless  
end-to-end lighting designs

**TRIDONIC DRIVER  
AS STANDARD**

Ensure reliability, durability and  
performance leading to  
long-lasting LEDs

