

## MERRYTEK MICROWAVE SENSOR IP65 20MM KNOCK OUT

NET-42-43-38



### Key Data

IP Rating	IP65
Dimensions	Ø50 x 73.5mm
Warranty	3 Years

### Compatible Accessories

NET-42-43-22	Merrytek Remote Control for Sensors
--------------	-------------------------------------

#### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	120-277V
Operating Temp.	-35°C to +55°C
Manufacturer	Merrytek
Lux Levels	5lux-150lux or Disabled
Max. Detection Distance	12m
Max. Load	400W Inductive or 800W Resistive
Power Frequency	50/60Hz
Housing Colour	White
Housing Material	Polycarbonate
Detection Angle	150° (wall mount) / 360° (ceiling mount)
Duration	5s - 30min

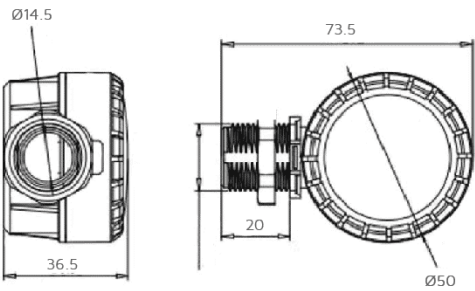

All units are in mm

Other Options

Description	
NET-42-43-38	Merrytek Microwave Sensor IP65 20mm Knock Out

**NET LED Lighting**  
Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY