


EMERGENCY KIT FOR ARBURY MULTI-WATTAGE HIGH BAYS

NET-53-20-08

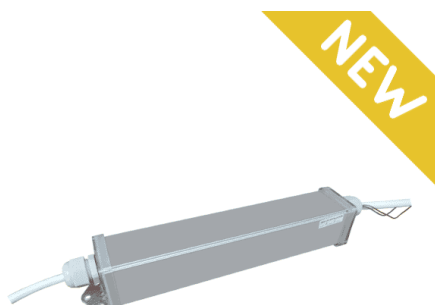

Features & Benefits

- Provides up to 3 hours of illumination during power outages or emergencies
- Compatible with Arbury High Bays

Key Data

Power	6W
Luminous Flux	840 (at 140lm/w)
IP Rating	IP65
Dimensions	50.4 x 51.8 x 311mm
Warranty	3 Years

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Total Circuit Power (W)	6W
Electrical Class	1
Operating Temp.	0°C to +50°C
Manufacturer	Fox Lux Emergency Lighting
Hours Maintained	>3H
Maintained	Yes
Recharge Period	8H
Self Test	Selectable
Housing Colour	Grey
Housing Material	Aluminium
Battery Pack	Li-ion 3.6V 10.0Ah
Battery Warranty	1 Year
Emergency Operation	3H

Other Options

Description	
NET-53-20-08	Emergency Kit for Arbury Multi-Wattage High Bays

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk