


DALI EMERGENCY KIT 3W

NET-61-33-03

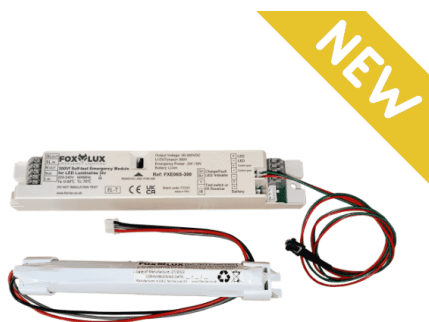

Key Data

| | |
|------------|-----------------|
| Power | 3W |
| Dimensions | 223 x 55 x 25mm |
| Warranty | 3 Years |

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|-----------------------------|
| Input Voltage (AC) | 220-240V |
| Driver Output Voltage (DC) | 60V |
| Total Circuit Power (W) | 3W |
| Electrical Class | 2 |
| Operating Temp. | 0°C to +45°C |
| Manufacturer | Fox Lux Emergency Lighting |
| AC Current | 220-240V |
| Output Power | 3W |
| Output Voltage | Up to 55V |
| Power Frequency | 50/60Hz |
| Recharge Period | <20H |
| Self Test | No |
| Housing Colour | White |
| Housing Material | Polycarbonate |
| Battery Pack | Li-ion 3.6V 5Ah (2 x 18650) |
| Battery Warranty | 1 Year |
| Charge Time | <20H |
| Emergency Operation | DALI or Self Test |

Other Options

| Description | |
|--------------|--|
| NET-50-12-08 | Manual/Self Test Emergency Selectable LED Converter 2.5W |
| NET-61-33-03 | DALI Emergency Kit 3W |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk