5 Years
Product Warranty
UK Only


Hontza

Kosnic
LIGHTING • SIMPLY BETTER

08805 HON-M

Hontza Plug in microwave motion & daylight sensor

- Unique mechanical design allows for easy installation of the sensor
- Super compact design
- Mounting height up to 6m
- Sensor setting with DIP switch or Uni-Remote
- Modular design for Kosnic linear luminaires

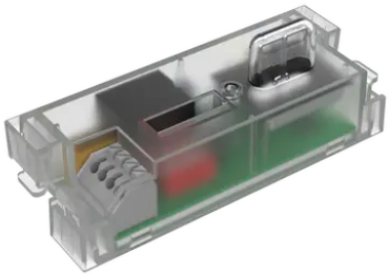

Overview

The Kosnic microwave motion and daylight sensor is a simple energy-saving solution that uses light only when and where you need it. The sensor has an adjustable sensitivity setting for use in that will detect motion and stay illuminated for the duration of the hold time after motion ends.

IP20

General Information

Ambient Temperature Range (°C)	-25°C to 60°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal

Compliance

Others	UKCA, CE, RoHS, WEEE

Technical Summary	
Product Code	HON-M
Weight	0.064Kg
Dimensions (L x W x D) (mm)	93x35x35
Sensor Function	Daylight Sensor

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only

Hontza

Kosnic
LIGHTING • SIMPLY BETTER

08805 HON-M

Accessories

Product Code	Description	Type
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control


Overview

The Kosnic microwave motion and daylight sensor is a simple energy-saving solution that uses light only when and where you need it. The sensor has an adjustable sensitivity setting for use in that will detect motion and stay illuminated for the duration of the hold time after motion ends.


IP20

General Information

Ambient Temperature Range (°C)	-25°C to 60°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal

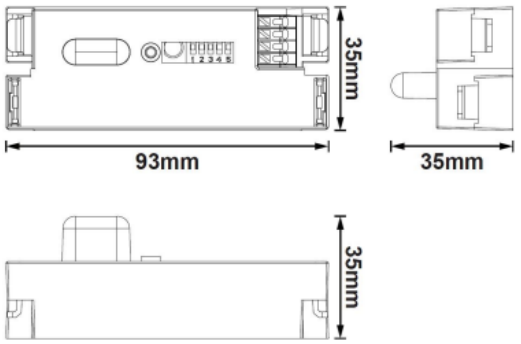

Wiring

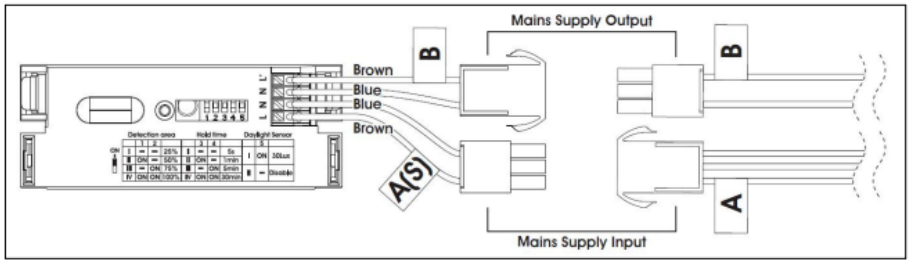

The sensor is allowed to be connected to one load only. The sensor may be damaged if connecting more than one load.

A1 - A2 Hold Time [MIN]	A3 - A4 Daylight Threshold [LUX]	A5 - A6 Stand-By Period [MIN]	A7 - A8 Stand- By Dim Level [%]	B1 - B2 Detection Area [%]	B3 - B4 CCT [K]	B5 - B6 Brightness [%]	B7 User Key	B8 Pair Key
Time stays ON after no motion detected	OFF when ambient light above threshold	Remains dimmed for this period if no motion detected & then turns off	Dimmed level in Stand-By	Sensor detection area/ sensitivity	Correlated colour Temperature	Adjust luminaire brightness	SECURITY SETTINGS	

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK


5 Years
Product Warranty
UK Only

Hontza

Kosnic
LIGHTING • SIMPLY BETTER

08805 HON-M

DIP Switch Setting

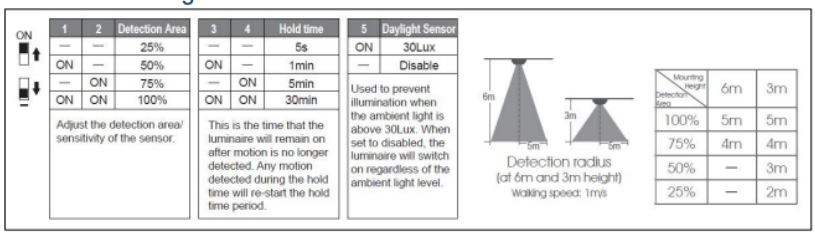

Factory Settings

The sensor ships with 100% detection area, 5sec hold time and Daylight sensor disable as default

Overview

The Kosnic microwave motion and daylight sensor is a simple energy-saving solution that uses light only when and where you need it. The sensor has an adjustable sensitivity setting for use in that will detect motion and stay illuminated for the duration of the hold time after motion ends.

IP20

General Information

Ambient Temperature Range (°C)	-25°C to 60°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK