

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Batten UEM DALI

09058 BEM303/DA

BEM 3W DALI switchable for Kosnic Battens

- For maintained or non-maintained emergency lighting systems
- Internal LiFePO4 battery with improved lifespan
- Designed for easy installation and battery replacement
- With patented adaptive current control, this emergency module is suitable for LED load with a forward voltage between 30to 300V
- DALI-2 conforming to EN 62386-202

Overview

The Emergency Module for LED

Batten Luminaires has been

designed for easy installation in a

range of Kosnic LED batten

luminaires. The emergency module

will adjust the output within the

module's limits to the level required

to operate the luminaire and ensure

an operation time of three hours.

The battery is replaceable.




IP20



General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II



Technical Summary

Product Code	BEM303/DA
Dimensions (L x W x D) (mm)	221x43x26
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 45°C
UEM/EME Maximum Working Voltage (Vdc)	310 V
UEM/EME Test Function	Automatic and Manual
UEM/EME Protection	Class II
UEM/EME Weight	0.23 kg
UEM/EME Battery Output Wattage (max)	3 W
UEM/EME Dimensions (L x W x D) (mm)	221x43x26

Compliance

LVD	EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only



Batten UEM DALI

09058 BEM303/DA


Accessories

Product Code	Description	Type
BAT18LFP2	Battery for BEM303	Battery

Overview


The Emergency Module for LED Batten Luminaires has been designed for easy installation in a range of Kosnic LED batten luminaires. The emergency module will adjust the output within the module's limits to the level required to operate the luminaire and ensure an operation time of three hours.

The battery is replaceable.

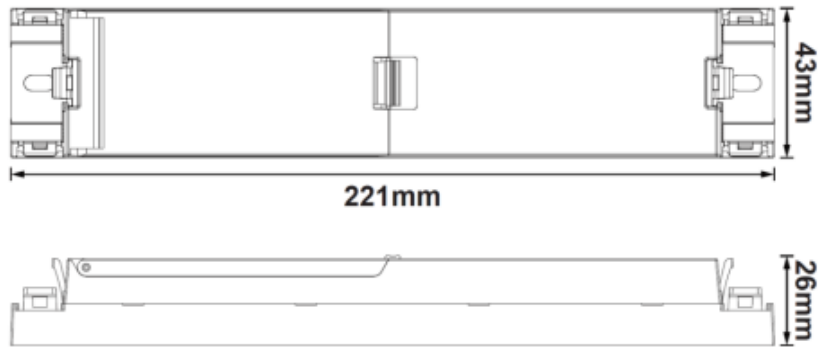

General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

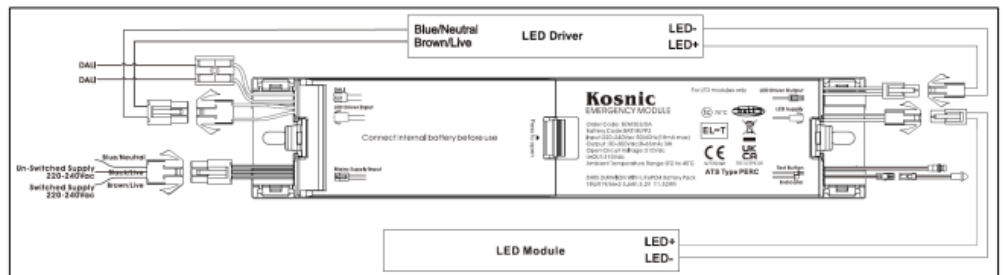

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK