

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Low Temp. Mulu 2 in 1

09066 MUL0105-LO/SST

Mulu Low Temp.Duo Emergency Bulkhead Manual&Self-test 6500K

- Can be used in ultra-low temperature environment
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic Self-test conforming to BS-EN-62034
- All legends included
- Maintained and non-maintained option
- 20mm Conduit entry
- IP65 and IK10 (vandal resistant) for internal & external uses
- Dual entry push-wire terminal block for easy loop-in loop-out wiring
- BESA box fitting points

Overview

Mulu LED Emergency Exit Sign or Emergency Bulkhead Luminaire is a self-contained, multi-purpose, non-maintained or maintained 3-hour emergency luminaire solution. It can be used with or without the emergency exit graphics and is supplied with adaptable self-adhesive graphics for escape routes guidance.



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: ABS, Diffuser: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II
L80B10 Lifetime (h) @Ta 25 °C	109,000 h

Compliance

Others	UKCA, CE, RoHS, WEEE, REACH
--------	-----------------------------

Technical Summary

Product Code	MUL0105-LO/SST
Lumens Output Maximum	80 lm
Emergency Luminous Flux	80 lm
L80B10 Lifetime (h) @Ta 25 °C	109,000 h
Dimensions (L x W x D) (mm)	352x110x67
BESA Entry	True
Conduit Entry 20mm	Yes
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class II
UEM/EME Weight	0.5 kg

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Low Temp. Mulu 2 in 1

09066 MUL0105-LO/SST

Accessories

Product Code	Description	Type
BATS16LFP1	Battery LiFePO4 1600mAh 3.2V	Battery


Overview

Mulu LED Emergency Exit Sign or Emergency Bulkhead Luminaire is a self-contained, multi-purpose, non-maintained or maintained 3-hour emergency luminaire solution. It can be used with or without the emergency exit graphics and is supplied with adaptable self-adhesive graphics for escape routes guidance.



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: ABS, Diffuser: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II

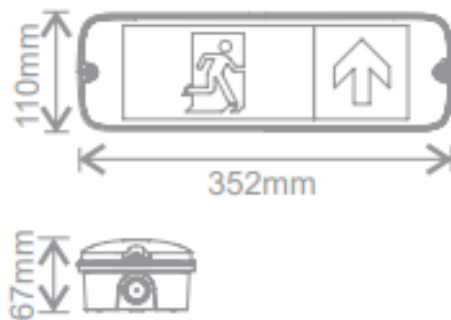

Push switch

x1	FUNCTIONAL TEST
x3	DURATION TEST
HOLD	INDICATOR DIMMING

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

