


## RAMSEY MARINE GRADE FLOOD LIGHT 6000K 150W

NET-23-04-13

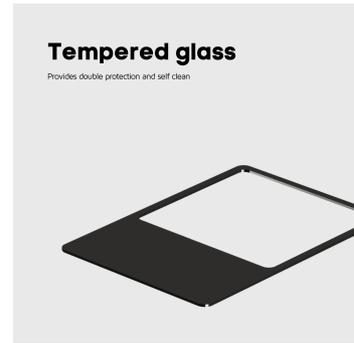

### Features & Benefits

- Marine Grade coating protects the fitting from harsh weather and sea salt - ideal for coastal applications
- Breather valve allows heat to escape and prevents condensation
- IP65 and IK08 protection
- Tempered glass provides double protection and good self-clean
- Complete with Tamper-Proof Fixings
- Excellent cooling performance that ensures a long lifespan

### Key Data

<b>Power</b>	150W
<b>Luminous Flux</b>	22790lm
<b>Colour Temperature</b>	6000K
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Dimensions</b>	511 x 295 x 73.5mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-42-04-39	2-in-1 Motion and Photocell Sensor
NET-23-16-61	Single Column Bracket
NET-23-16-63	Twin Column Bracket
NET-23-16-65	Single Pivot Bracket
NET-23-16-67	Twin Pivot Bracket

#### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
 Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




**ORDER BY 6PM**  
 FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	100-270V
Power Factor	>0.90
Luminaire Efficacy	145lm/W
LED Manufacturer	Sanan
LED Type	EMC 3030
No. of LEDs	224
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	42V
Total Circuit Power (W)	150W +/- 5W
Electrical Class	1
Colour Rendering	>70 CRI
Lamp Viewing Angle	90°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	27
Weight	7.2Kg
Manufacturer	FYTLED
Power Frequency	47-63Hz
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	Glass
Inrush Current (Peak)	62A
Inrush Current (Duration)	423ms

**PRODUCT DIMENSIONS**



	A	B	C	D
100W	295	318	73.5	463
150W	295	369	73.5	511
200W	295	420	73.5	562
240W	295	420	73.5	562

All units are in mm

## Other Options

Description	
NET-23-04-11	Ramsey Marine Grade Flood Light 6000K 100W
NET-23-04-13	Ramsey Marine Grade Flood Light 6000K 150W
NET-23-04-15	Ramsey Marine Grade Flood Light 6000K 200W
NET-23-04-17	Ramsey Marine Grade Flood Light 6000K 240W
NET-23-04-22	Ramsey Marine Grade Flood Light 6000K 200W Emergency
NET-23-04-21	Ramsey Marine Grade Flood Light 6000K 150W Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

**TEMPERED GLASS**

Provides double protection and self clean

**IK08 AND IP65 RATED HOUSING**

Protect your flood light from water, dust and impact

**BREATHER VALVE**

Prevents condensation from building up inside the fitting

**6K**

**6000K COLOUR TEMPERATURE**

Bright and crisp light best used for industrial spaces

**MARINE GRADE COATING**

Protect your flood light from harsh weather and sea salt - perfect for coastal applications

**TOOL-FREE BOLTS**

Set the angle of the flood light without the need for tools

**UP TO 3,000 LUMENS IN EMERGENCY MODE**

Its high output Emergency operation ensures the fitting comes on in the event of a power failure

*Emergency options only*

