





<b>Category</b>	Emergency
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

# Signal Pro

Signal Pro Emergency Downlight Non-Maintained

**Code:** ASPRLED/LI/3M/DA



## PRODUCT FEATURES

- LiFePO4 Lithium battery provides enhanced product lifetime
- High specification optic design and performance allows increased spacing providing reduced cost
- 70mm to 120mm cut-out
- Supplied with open area and escape route interchangeable lenses
- DALI emergency as standard
- If not connected to DALI network Self-test mode operates automatically

### GENERAL INFORMATION

<b>Wattage</b>	2.5W
<b>Lumens Delivered</b>	240lm(OA) / 230lm(ER)
<b>Lm/W</b>	115lm/W
<b>Beam Angle</b>	Open area - 144° Escape route - 143°x120°
<b>CRI</b>	70
<b>CCT</b>	6500K
<b>Input</b>	220-240V
<b>Operating Temp</b>	5°C - 40°C
<b>SDCM</b>	5
<b>Cut-Out Size</b>	72mm
<b>Product Weight without Packaging</b>	0.441 kg

### TECHNICAL INFORMATION



<b>Light Source</b>	LED
<b>Colour / Finish</b>	White
<b>IP Rating</b>	IP20
<b>Class Protection</b>	2
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Recessed
<b>Lumen Depreciation</b>	L80 72,000h
<b>Warranty (Years)</b>	6
<b>CE Mark</b>	Yes
<b>Diameter</b>	84 mm
<b>Height</b>	35 mm
<b>Emergency Output Duration</b>	3 Hr



<b>Category</b>	Emergency
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

# Signal Pro

Signal Pro Emergency Downlight Non-Maintained  
**Code:** ASPRLED/LI/3M/DA

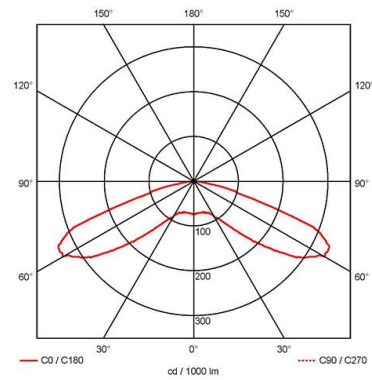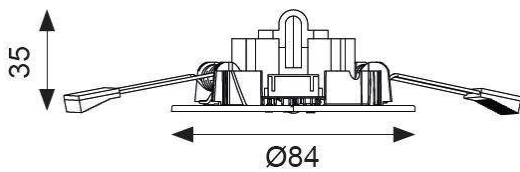

## SPARES

ASBP/19

6.4V 1500mAh LiFePO4 Lithium Replacement Battery