



Application	Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Tauro

Tauro Bollard Black
Code: ATAURO/1/BK



PRODUCT FEATURES

- Robust die-cast aluminium bollard with a textured graphite finish suitable for education, commercial and hospitality outdoor applications
- Precision-engineered lensed optic delivers exceptional light distribution and performance, ensuring maximum efficiency and visual comfort
- Comes complete with a AFIX connector (AFIXIP/1/SC/3C) for quick and easy IP rated connection
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 4 outputs, in one luminaire
- Removable head design allows easy access to the integrated CCT and wattage switches, seamlessly housed within the head for quick adjustments and enhanced convenience during installation or maintenance
- Supplied c/w base plate, root mounting kit accessory available

GENERAL INFORMATION

Wattage	6W - 24W
Lumens Delivered	750lm - 2900lm (4000K)
Lm/W	125lm/W (4000K)
Beam Angle	140
CRI	80
CCT	3000K/4000K
Input	220-240V
Operating Temp	-30°C - 50°C
SDCM	5
Product Weight without Packaging	5.13 kg

TECHNICAL INFORMATION



Light Source	LED
Colour / Finish	Black
IP Rating	IP66
IK Rating	IK08
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Floor
Lumen Depreciation	L80 60,000h
Warranty (Years)	5
CE Mark	Yes
Diameter	170 mm
Height	1,040 mm



Application	Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Performance

Tauro

Tauro Bollard Black
Code: ATAURO/1/BK

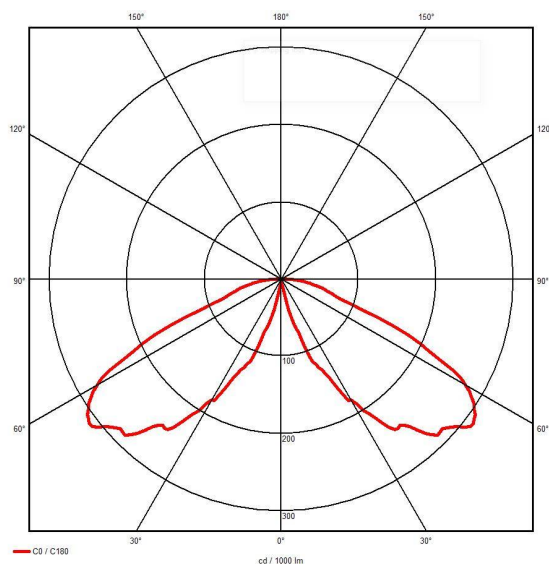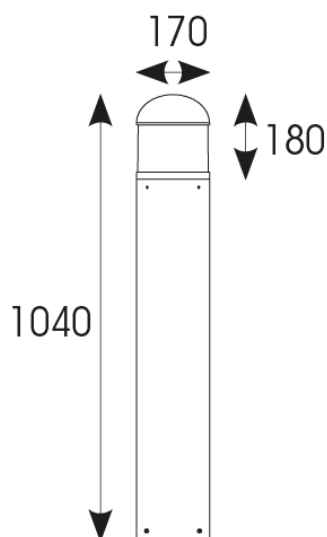

ACCESSORIES

ATAURO/HS/BK	Tauro Bollard Half Shield Black
ARMKIT/1	Bollard Root Mounting Kit