



# Tridon



Part of the Wall Lights product category

<b>Model</b>	Tridon CCT Black
<b>Code</b>	ATRILED/B
<b>Application</b>	Ancillary, Hospitality, Industrial, Outdoor, Residential, Retail

## GENERAL INFORMATION

<b>Input</b>	220-240V
<b>Wattage</b>	8W
<b>Operating Temp</b>	-20°C - 40°C
<b>Lumens Delivered</b>	700lm (4000K)
<b>lm/W</b>	88lm/W (4000K)
<b>CCT</b>	3000/4000K
<b>Beam Angle</b>	120

## MATERIAL INFORMATION


<b>Diffuser Material</b>	Polycarbonate
<b>Product Weight without</b>	1.583 kg
<b>Packaging</b>	
<b>Colour / Finish</b>	Black
<b>Height</b>	320 mm

## TECHNICAL INFORMATION

<b>Class Protection</b>	1
<b>Light Source</b>	LED
<b>SDCM (Initial Macadam)</b>	5
<b>CRI</b>	80
<b>Internal / External</b>	External
<b>Surface / Recessed / Suspended</b>	Wall
<b>Power Factor</b>	0.6
<b>L70 @ 25°C</b>	L70 B50 60,000h

## PRODUCT FEATURES

- IP66 rated die-cast aluminium wall light with opal polycarbonate diffuser suitable for commercial, hospitality and industrial applications
- CCT selection allows the installer to choose the CCT between 3000K and 4000K
- Rear fixing points allowing the option for BESA box mounting
- Horizontal side pilot holes accepting 20mm surface conduit entries
- Tamper-proof stainless steel allen key screws

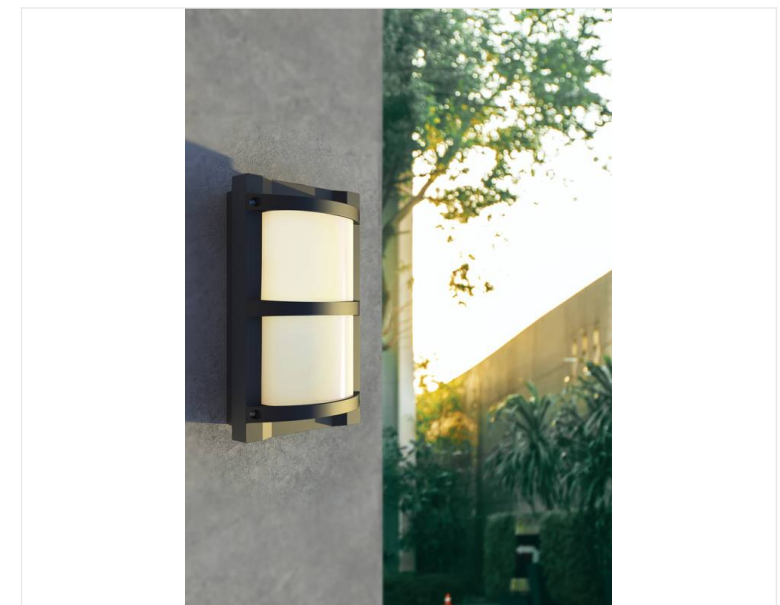



# Tridon



Part of the Wall Lights product category

<b>Model</b>	Tridon CCT Black
<b>Code</b>	ATRILED/B
<b>Application</b>	Ancillary, Hospitality, Industrial, Outdoor, Residential, Retail

