


# Unity 80

Unity 80 Downlight Cool White 1-10V DALI-  
Code: AULED80D/DD4/DM3

|               |                                                                    |
|---------------|--------------------------------------------------------------------|
| Category      | Downlights                                                         |
| Application   | Ancillary, Commercial, Education, Hospitality, Residential, Retail |
| Specification | Architectural                                                      |

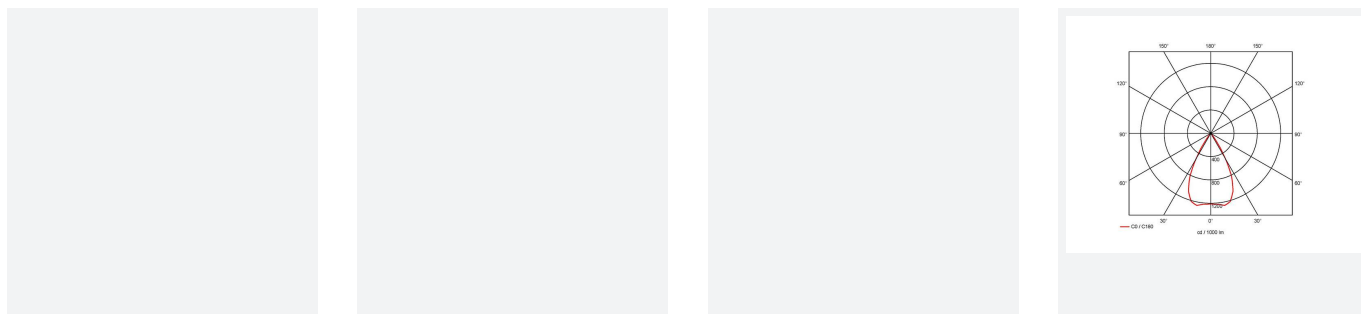

## PRODUCT FEATURES

- IP44 (downlight only) compact high performance architectural downlight and gimbal suitable for commercial, hospitality and retail applications
- Die-cast aluminium construction, powder coated and 30° cut-off angle
- Anti-glare design to create visual comfort
- Powered by Tridonic
- 30° tilt angle (gimbal only)
- Mirror finished anodized reflector
- Remote driver with plug and play connection

## GENERAL INFORMATION

|                  |            |
|------------------|------------|
| Wattage          | 15W        |
| Lumens Delivered | 1200lm     |
| Lm/W             | 77lm/W     |
| Beam Angle       | 55         |
| CRI              | 90         |
| CCT              | 4000K      |
| Input            | 220-240V   |
| Operating Temp   | 0°C - 25°C |
| SDCM             | 3          |
| UGR              | 19         |
| Cut-Out Size     | 80mm       |

## TECHNICAL INFORMATION

|                                |             |
|--------------------------------|-------------|
| Light Source                   | LED         |
| Colour / Finish                | White       |
| IP Rating                      | IP44        |
| Class Protection               | 2           |
| Internal / External            | Internal    |
| Surface / Recessed / Suspended | Recessed    |
| Lumen Depreciation             | L70 50,000h |
| Warranty (Years)               | 5           |
| CE Mark                        | Yes         |
| Diameter                       | 90 mm       |
| Height                         | 83 mm       |

