



GL019

Up to 2W, 180lm mini ground light

Features

IK Rating	IK07
IP Rating	IP68
CSP Switchable	Single CCT
Walk Over / Drive Over	Walk over
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

Installation information

Cut Out Size	33
UK Bathroom Zone	0
Inrush Current	N/A
Construction Material	Stainless steel (316)
Weight	204g
Ambient Temperature Range	50°C
Electric Class (1, 2, 3)	3

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	0	1	9
PLU/700 3-9	220-240V	Yes	No	0	3	9
PSIP70018W	220-240V	Yes	No	0	1	8

Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 years



Features & benefits

- 1W at 350mA or 2W at 700mA
- Coastal protected
- Low voltage ground light
- Compact yet powerful fitting
- Shallow depth for easy installation
- Robust cable for outdoor use

Light source
energy efficiency:



Beam angles: 12° 38°

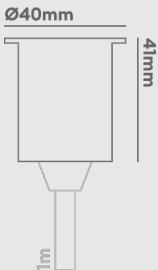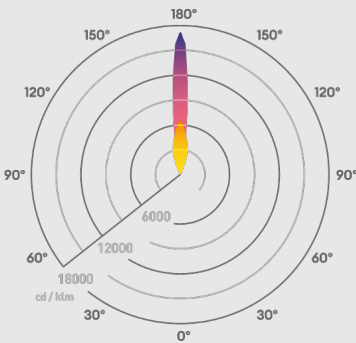

Photometrics @ 25°C

Product code	Finish	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
				350mA				700mA			
GL019 F NW	Stainless steel	4000K	38°	1W	100	100	356	2W	180	90	641
GL019 S NW	Stainless steel	4000K	12°	1W	100	100	1715	2W	180	90	3087
GL019 F WW	Stainless steel	3000K	38°	1W	90	90	320	2W	150	75	534
GL019 S WW	Stainless steel	3000K	12°	1W	90	90	1543	2W	150	75	2572
GL019 F 27	Stainless steel	2700K	38°	1W	80	80	285	2W	130	65	463
GL019 S 27	Stainless steel	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019 F AMBER	Stainless steel	Amber	38°	1W	20	20	88	2W	-	-	-
GL019 F BLUE	Stainless steel	Blue	38°	1W	15	15	66	2W	25	13	110
GL019 F RED	Stainless steel	Red	38°	1W	35	35	154	2W	-	-	-
GL019 S RED	Stainless steel	Red	12°	1W	35	35	712	2W	-	-	-
GL019BNBX27	Black	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019BNBX30	Black	3000K	12°	1W	90	90	1543	2W	150	75	2572
GL019BNBX40	Black	4000K	12°	1W	100	100	356	2W	180	90	641
GL019BNBXBL	Black	Blue	12°	1W	15	15	306	2W	25	13	509
GL019BWBX27	Black	2700K	38°	1W	80	80	285	2W	130	65	463
GL019BWBX30	Black	3000K	38°	1W	90	90	320	2W	150	75	534
GL019BWBX40	Black	4000K	38°	1W	100	100	356	2W	180	90	641
GL019BWBXBL	Black	Blue	38°	1W	15	15	66	2W	25	13	110
GL019AWBX27	Antique brass	2700K	38°	1W	80	80	285	2W	130	65	463
GL019AWBX30	Antique brass	3000K	38°	1W	90	90	320	2W	150	75	534
GL019ANBX27	Antique brass	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019ANBX30	Antique brass	3000K	12°	1W	90	90	1543	2W	150	75	2572



collingwood

01604 495 151
collingwoodlighting.com

 collingwoodled

 /collingwoodlighting

 collingwoodlighting

GL019

Discreet yet powerful, this 1W LED powered ground light is perfect for decking areas, entrance halls and pathways. Indoors or out, the IP68 Stainless Steel finish ground light will give a flawless performance for many years of maintenance free operation. Available in four ambient LED colours, the GL019 is the most popular ground light in the Collingwood range.