
Datasheet

P/N: GA710-24FF000-XXX

2.4mm 4 Hole Flange Female to Trimmed Lead Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 50GHz

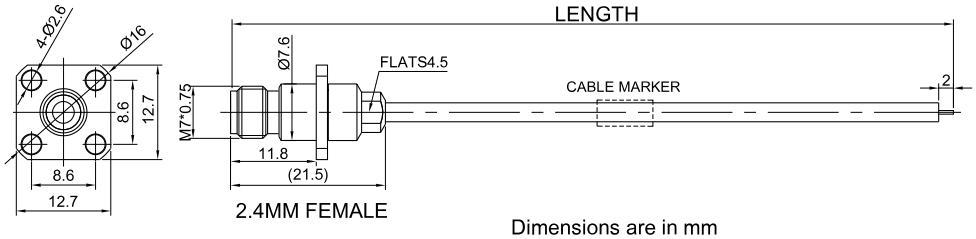

2.4MM FEMALE

Dimensions are in mm




Connectors Configuration

	Connector 1
Connector Series	2.4mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50
Connector Mount Method	4 Hole Flange
Connector Body Style	Straight
Connector Body Material	Stainless Steel
Connector Body Plating	Passivated

Cable Configuration

Cable Type	.086" Semi-rigid Cable (Copper)
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver plated copperweld
Dielectric Material	Solid PTFE
Shield Layer 1 Material	Copper
Cable Diameter (mm)	2.2
Cable Color	Cooper
Minimum Bend Radius (mm)	6mm
Capacitance (pF/m)	95
Velocity of Propagation	70%
Shielding Effectiveness	<-120dB @ 1GHz

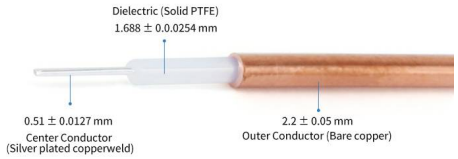

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com

P/N: GA710-24FF000-XXX

2.4mm 4 Hole Flange Female to Trimmed Lead Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 50GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC-50GHz	1.44 to 50GHz	1.32 to 40GHz
200	±3			1.94 to 40GHz
300	±5			2.56 to 40GHz
500	±5			3.82 to 40GHz
1000	±10			6.92 to 40GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45 ºC to +85 ºC