
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GA711-185FGPPF-XXX

1.85mm Female to GPPO(Mini-SMP) Female Cable Assembly | 086" Semi-Flexible Coax Cable without FEP Jacket | DC - 65GHz

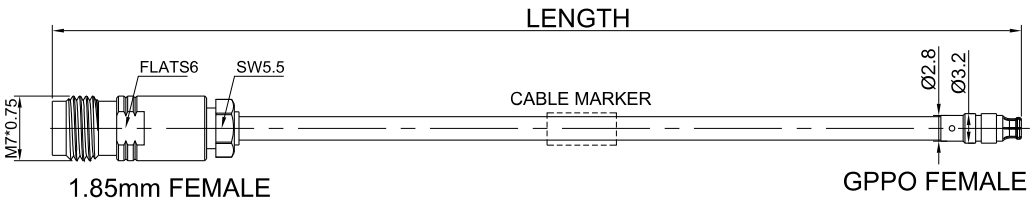

Dimensions are in mm




Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

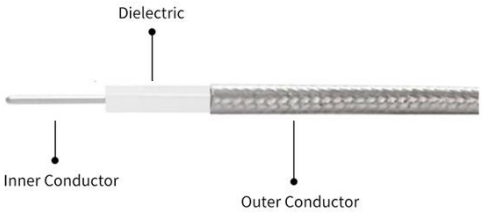

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GA711-185FGPPF-XXX

1.85mm Female to GPPO(Mini-SMP) Female Cable Assembly | 086" Semi-Flexible Coax Cable without FEP Jacket | DC - 65GHz

Electrical Data


Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 65GHz	12dB	1.70 to 65GHz
150	±3			2.20 to 65GHz
200	±3			2.70 to 65GHz
250	±3			3.20 to 65GHz
300	±5			3.70 to 65GHz
400	±5			4.70 to 65GHz
500	±5			5.70 to 65GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C

Test Report for Cable assembly

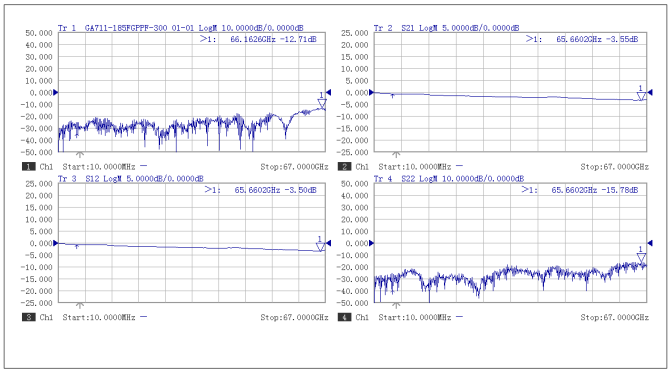

**Note:Test Cable Assembly Length = 300 mm*

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com