


P/N: GA711-SMWM1SMWM1-XXX

**SMA Right Angle Male to SMA Right Angle Male Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz**

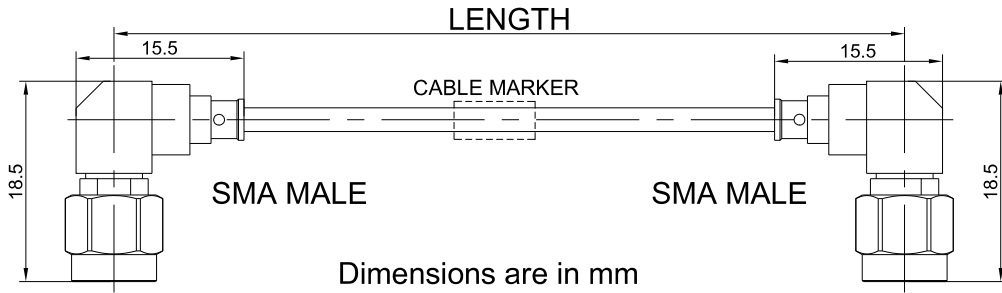


**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Right Angle	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**Cable Configuration**

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

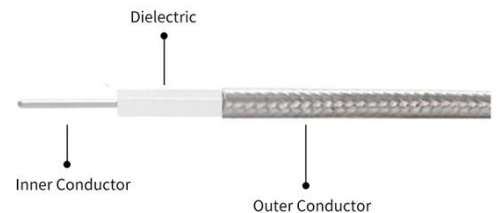

P/N: GA711-SMWM1SMWM1-XXX

SMA Right Angle Male to SMA Right Angle Male Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz

**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 18GHz	≤ 1.35	0.83
150	±3			0.99
200	±3			1.16
250	±3			1.34
300	±5			1.49
400	±5			1.82
500	±5			2.15

**Environmental Specifications**

RoHS Compliant

Yes

Operating Temperature Range

-40°C to +125°C