


P/N: GA711-SSMAMGPWF-XXX

SSMA Male to GPO(SMP) Right Angle Female Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz



Dimensions are in mm

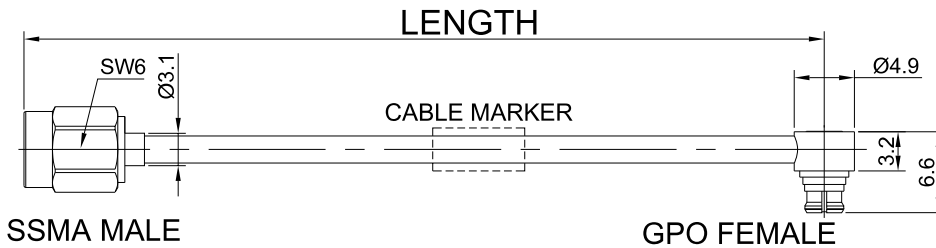


Connectors Configuration

	Connector 1	Connector 2
Connector Series	SSMA	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Right Angle
Connector Body Material	Stainless Steel	CuBe
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

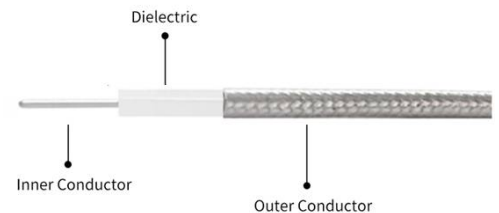

P/N: GA711-SSMAMGPWF-XXX

SSMA Male to GPO(SMP) Right Angle Female Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz

Electrical Data

Environmental Specifications


RoHS Compliant

Yes


Operating Temperature Range

-40°C to +125°C

Test Report for Cable assembly

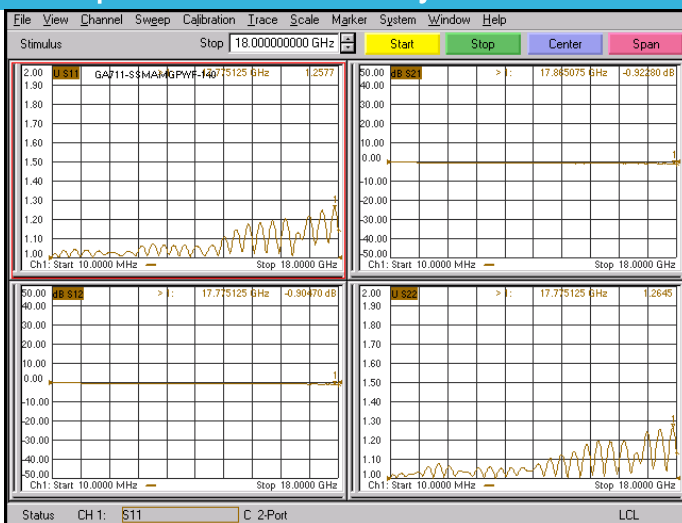

*Note: Test Cable Assembly Length = 140 mm

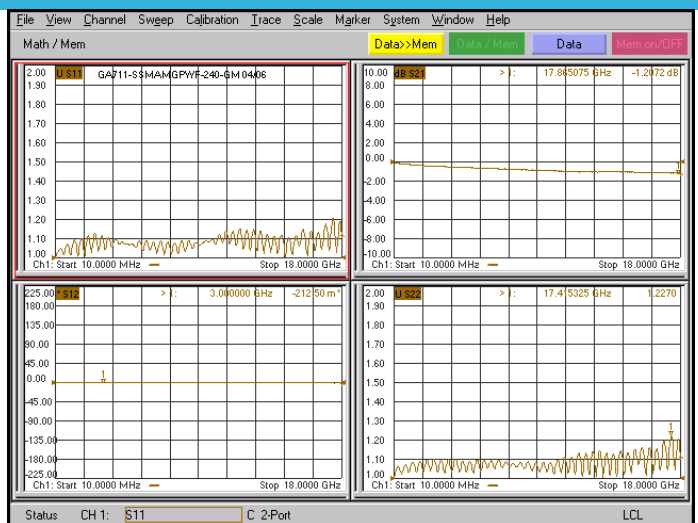

*Note: Test Cable Assembly Length = 240 mm